

---

# FEELUX

Change your Light, Change your Life!

---



FLX Micro Series



## FLX Micro Track System

### Ultra Slim Power Track System

### FLX Micro Track System


- Ultra slim Spot, Linear fixtures with power track
- Miniature design
- Rotatable head
- Constant voltage DC 24V driver
- Available in black
- Various beam angles (18°, 32°, 46°)
- Dimmable
- Direct power supply without track

## FLX Spot Wireless

### Wireless Mini LED Spotlight


### FLX Spot Wireless

- Wireless spot lighting for furniture, showcase, museum
- Miniature design
- Rotatable head
- Constant voltage DC 24V driver
- Available in black (Special order option: gold, silver)
- Various beam angles (18°, 32°, 46°)
- Wireless power

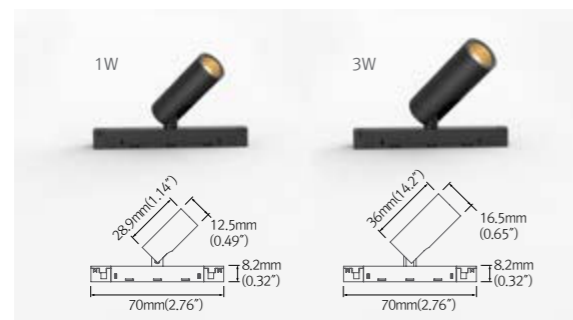


### Micro Track Spot

Input	DC 24V	Watt	1W/3W
CRI	Ra>90	Colors	3,000/4,000K
Lumen	75lm/W	Beam angle	18°/32°/46°

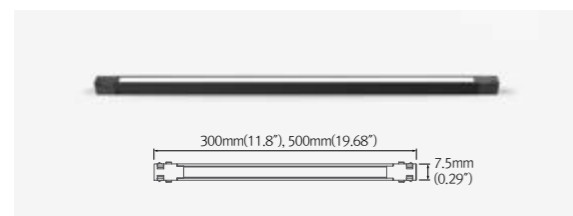

### Micro Track Linear

Input	DC 24V	Watt	3/5W
CRI	Ra>90	Colors	3,000/4,000K
Lumen	65lm/W	Length	300(11")/600(23.62")

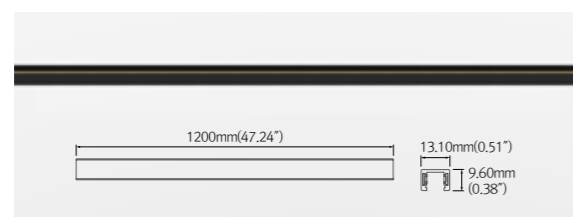



### Micro Track

Length	1,200(47.24")
--------	---------------



Input	DC 24V	Watt	1W/3W
CRI	Ra>90	Lumen	75lm/W
Beam angle	18°/32°/46°		

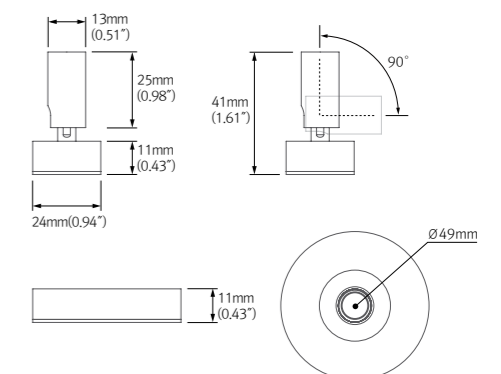

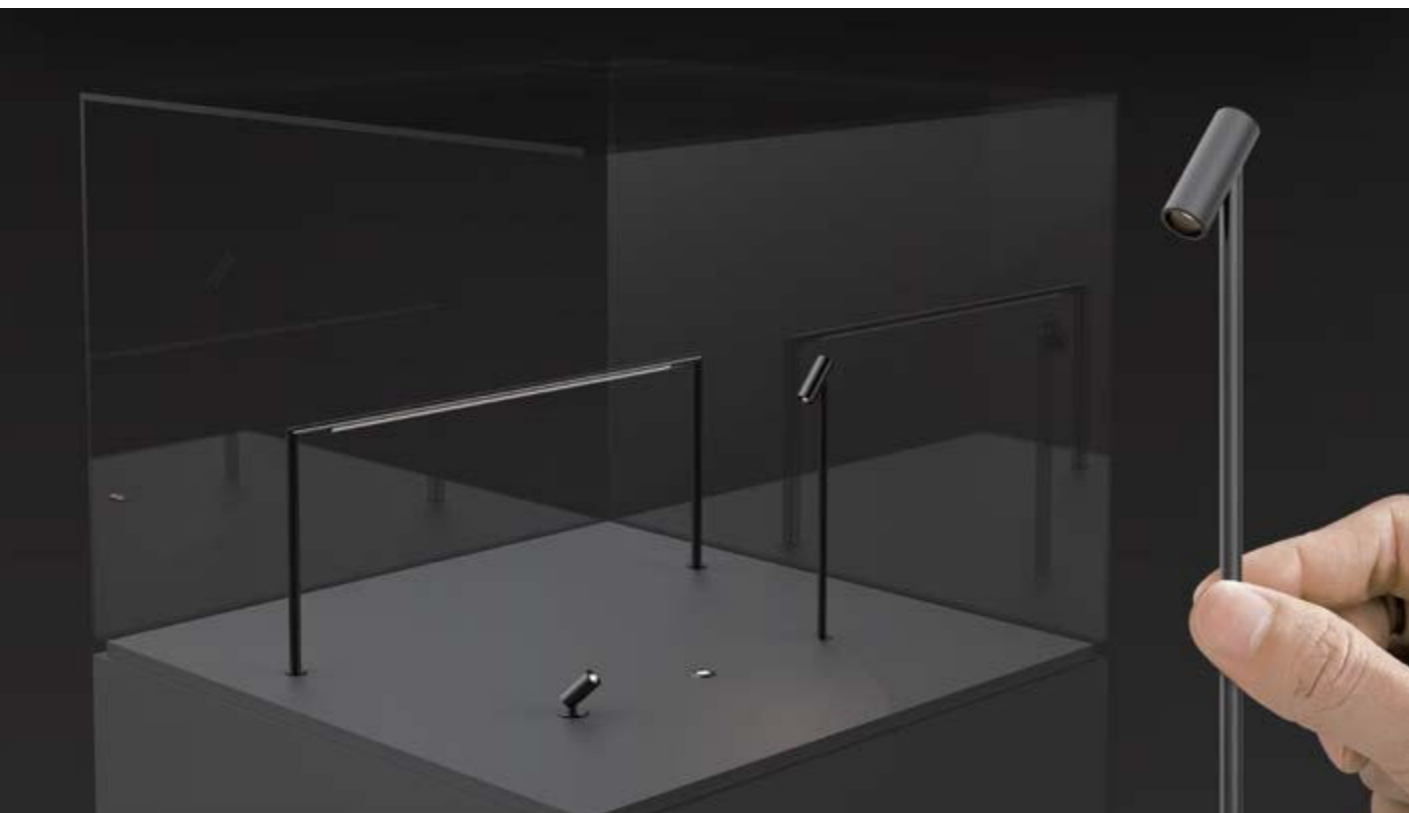



### FLX Micro Series

- Miniature lighting for furniture, showcase, museum
- Super slim design
- Adjustable pole length, Rotatable head
- Constant voltage DC 24V driver
- Available in black (Special order option: gold, silver)
- Various beam angles (18°, 32°, 46°)
- Dimmable

## FLX Micro Series

### Super Small Showcase & Furniture Lighting



#### \*Micro Arm

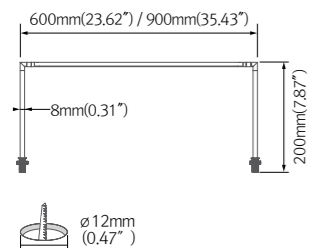

#### Micro Arm

Watt	4W/8W/12W	CRI	Ra>90
Lumen	80 lm/W	Beam angle	110°

#### \*Micro Point

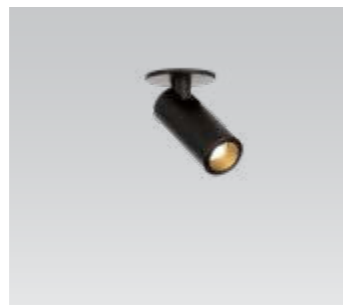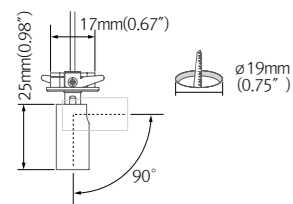

#### Micro Point


Watt	1W	CRI	Ra>90
Lumen	70 lm/W	Beam angle	18°/32°/46°




#### Micro Pole

Watt	1W	CRI	Ra>90
Lumen	70 lm/W	Beam angle	18°/32°/46°

#### \*Micro Pole

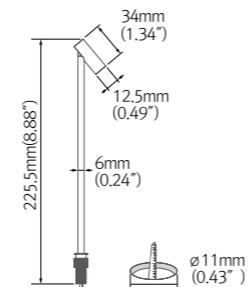


#### \*Micro Spot

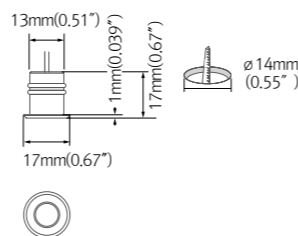


#### Micro Spot

Watt	1W	CRI	Ra>90
Lumen	70 lm/W	Beam angle	18°/32°/46°

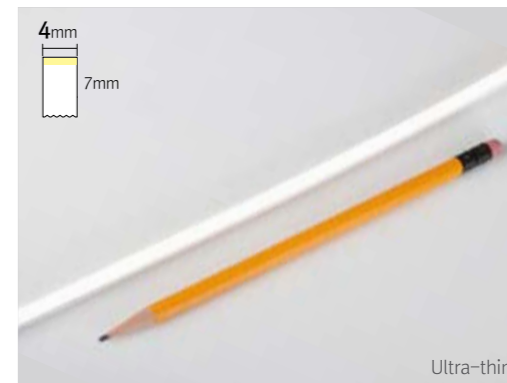


Ultra-thin

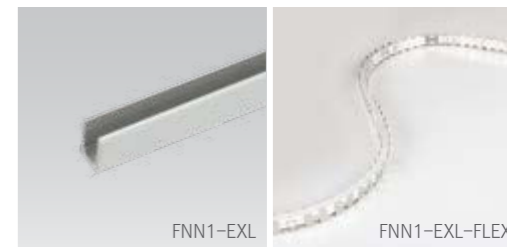

FNN1-EXL

FNN1-EXL-FLEX

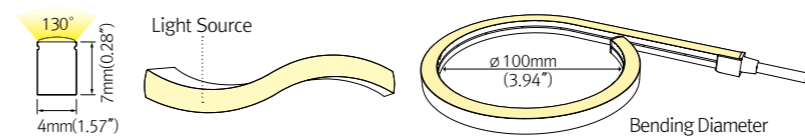

### FLXible Neon 1 Narrow

- 4X7mm Ultra thin dot-free flexible luminaire
- Seamless, Dimmable, cuttable, Silicone material
- Ideal for Narrow space in the cabinet, shelf any other furniture
- Field Cuttable (33.4mm)
- Horizontal bending


Input	DC 24V	Watt	7.7W/m	IP Rating	IP65
Lumen	57lm/W	Max run lengths	5M	CRI	Ra>90
Colors	2700/3000/3500/4000K				



Ultra-thin



FNN2-EXL

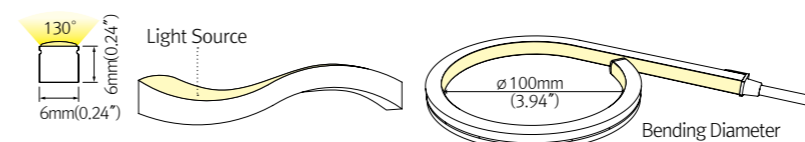

### FLXible Neon 2 Narrow

- 6X6mm Ultra thin dot-free flexible luminaire
- Seamless, Dimmable, cuttable, Silicone material
- Ideal for Narrow space in the cabinet, shelf any other furniture
- Field Cuttable (33.4mm)
- Vertical bending


Input	DC 24V	Watt	7.2W/m	IP Rating	IP65
Lumen	93lm/W	Max run lengths	5M	CRI	Ra>90
Colors	2700/3000/3500/4000K				



## FLT Mini Track System

Super slim magnetic low voltage track system

- Ultra slim fixtures on easy magnetic rail system
- Adjustable beam angle by zoom function
- Available tilting up to 90°
- Safe with constant voltage DC 48V
- Various track options
- Easily extendable with direct connector
- Dimmable

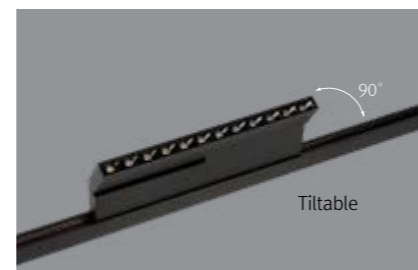

Power Connector  
\_FTMOPC



Direct Connector  
\_FTMCPL



Flexible Connector  
\_FTMPTC



**FTM-SS03**

Input	DC 48V	Watt	3W
CRI	Ra>90	Beam angle	15° / 24°
Lumen	70lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-SS05**

Input	DC 48V	Watt	5W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	72lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-SS05-ZOOM**

Input	DC 48V	Watt	5W
CRI	Ra>90	Beam angle	15° ~ 40°
Lumen	72lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-SS10**

Input	DC 48V	Watt	10W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	87lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-SS15**

Input	DC 48V	Watt	15W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	78lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-SS15-ZOOM**

Input	DC 48V	Watt	15W
CRI	Ra>90	Beam angle	20° ~ 55°
Lumen	78lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-LS20**

Input	DC 48V	Watt	10W
CRI	Ra>90	Beam angle	30°
Lumen	52lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-LS20-TILT**

Input	DC 48V	Watt	10W
CRI	Ra>90	Beam angle	30°
Lumen	52lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-LS30**

Input	DC 48V	Watt	15W
CRI	Ra>90	Beam angle	30°
Lumen	53lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-LS30-TILT**

Input	DC 48V	Watt	10W
CRI	Ra>90	Beam angle	30°
Lumen	53lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-LM20**

Input	DC 48V	Watt	10W
CRI	Ra>90	Beam angle	110°
Lumen	54lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-LM20-TILT**

Input	DC 48V	Watt	10W
CRI	Ra>90	Beam angle	110°
Lumen	54lm/W	Colors	2,700/3,000/3,500/4,000K



**FTM-LM30**


Input	DC 48V	Watt	15W
CRI	Ra>90	Beam angle	110°
Lumen	54lm/W	Colors	2,700/3,000/3,500/4,000K





**FTM-LM30-TILT**

Input	DC 48V	Watt	15W
CRI	Ra>90	Beam angle	110°
Lumen	54lm/W	Colors	2,700/3,000/3,500/4,000K


Surface track



Surface track  
\_FTM-TRS1





Surface track  
\_FTM-TRS2




Trimless track



Trimless track  
\_FTM-TRT1




Trimless track  
\_FTM-TRT2




Pendant track



Round (Pendant) track  
\_FTM-TRP



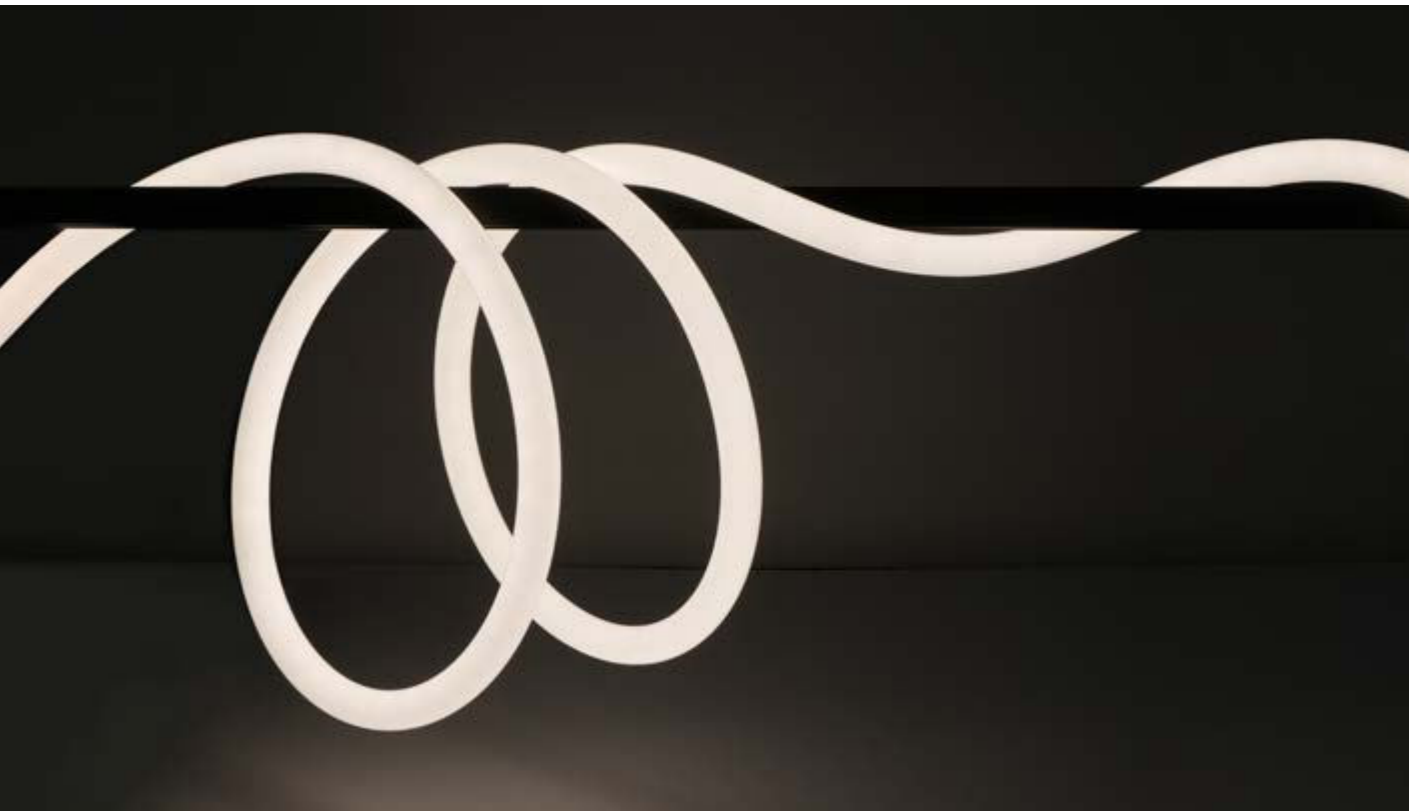

## FLXible Neon 360



3D Flexible Luminaires For Various Application




### FLXible Neon 360

- 360° degree Illumination Decorative Lighting
- Bendable in any direction
- Field Cuttable 50mm(1.97")
- Available in Standard Lengths of 1,2,3,4,5M Reels
- Architectural and interior contour lighting
- Dimmable
- Tunable, RGBW available
- Side feed option available
- Posable

Input	DC 24V	Watt	10W/m	IP Rating	IP65
Lumen		60 lm/W	CRI		Ra>90
Colors		2400/2700/3000/3500/4000K			
Beam Angle					360°

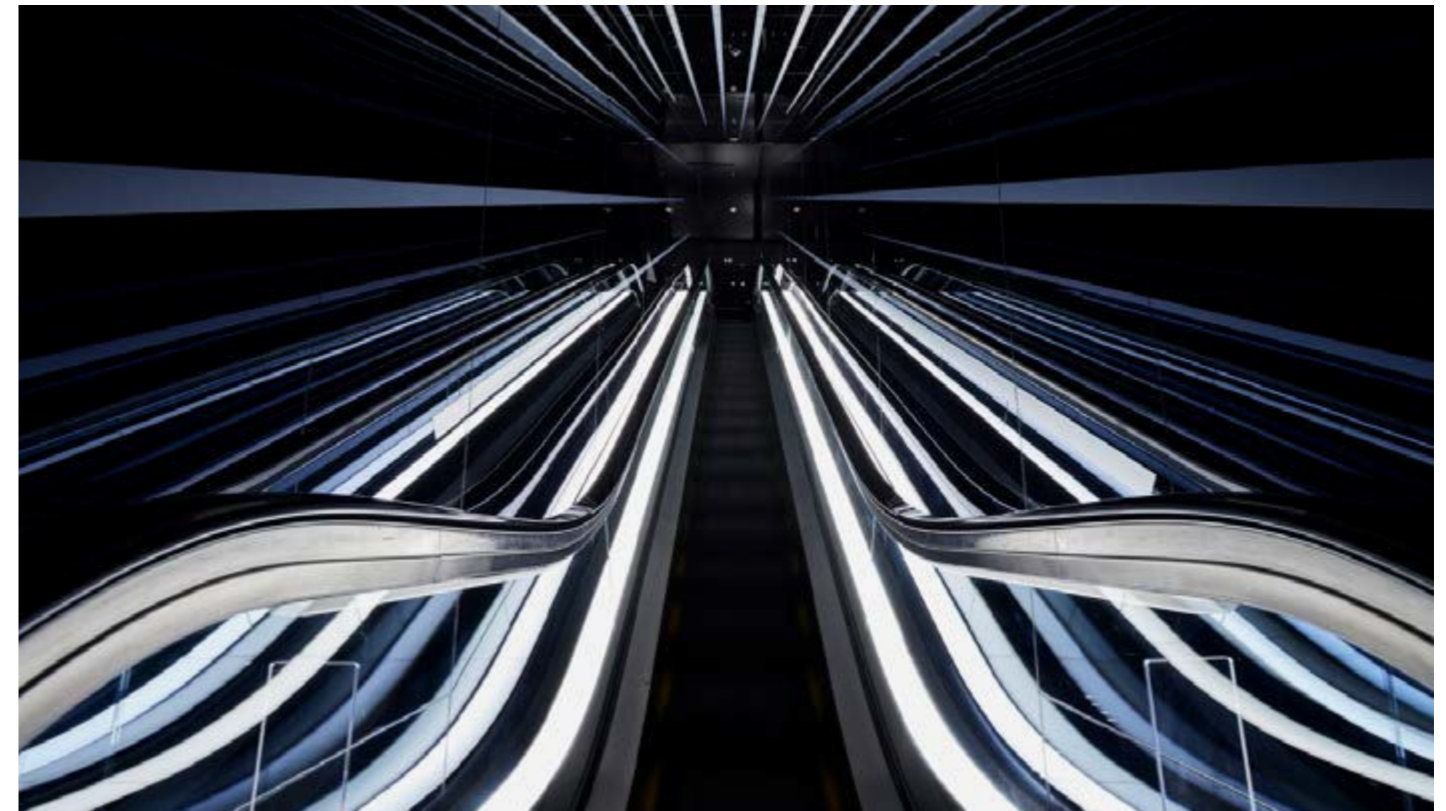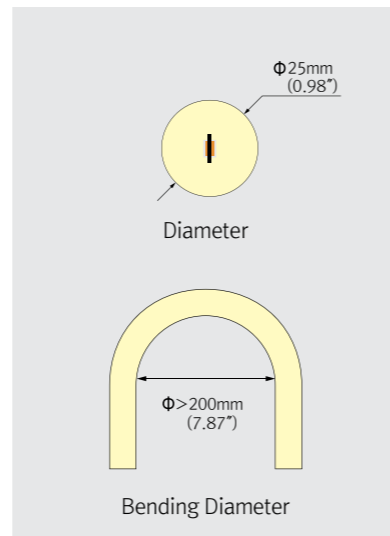



## FLXible Neon 3D

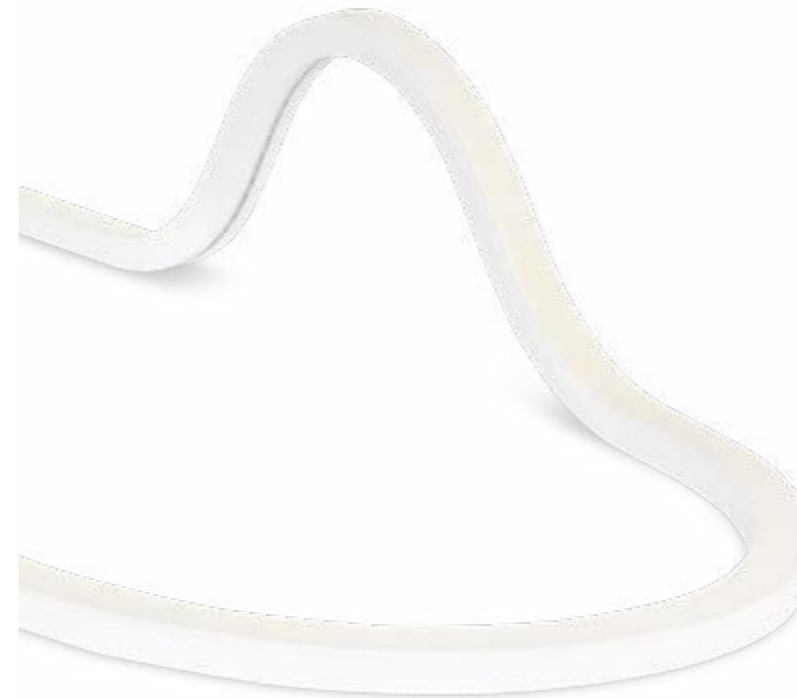


### FLXible Neon 3D

- Flexible LED, bending both horizontally and vertically
- Fully sealed with Silicon material(IP67)
- Cuttable and flexible to have design freedom (20.83mm)
- High output seamless spot free illumination
- Dimmable
- Various Feed Option Available (Left Side Feed, Bottom Feed Type)

Input	DC 24V	Watt	15W/m	IP Rating	IP67
Lumen		70lm/W	CRI		Ra>90
Colors		2400/2700/3000/3500/4000K			

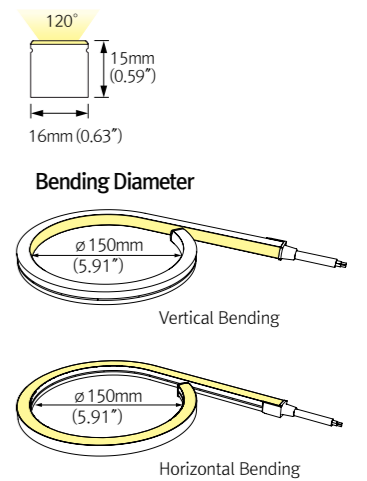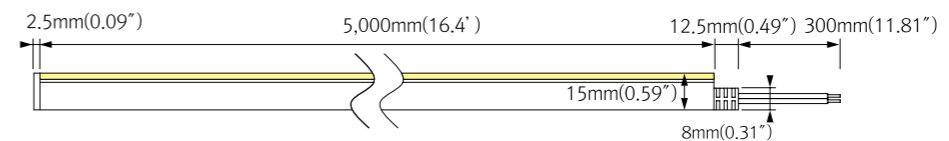

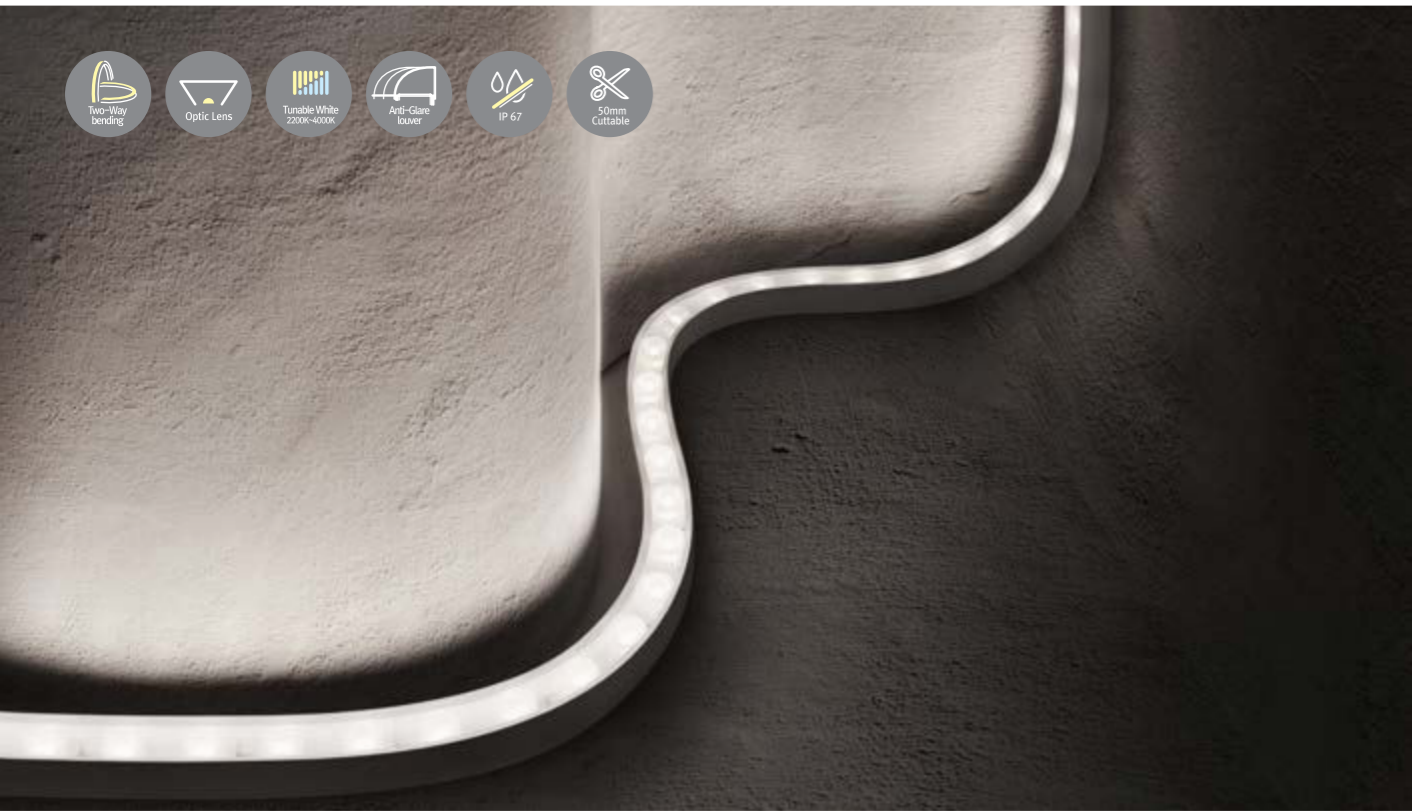



## FLXible Neon Lens 3D





### FLXible Neon Lens 3D

- Flexible LED, bending both horizontally and vertically
- Fully sealed with Silicon material(IP67)
- Various beam angles available with optics
- Field-cuttable to have design freedom (55.4mm)
- Extrusion, louver, angle bracket accessory
- Tunable available
- Bottom Feed Option Available
- Various types of extrusion available

Input	DC 24V	Watt	20W/m	IP Rating	IP67
Lumen	80lm/W	CRI			Ra>90
Colors			2700/3000/3500/4000K		
			2200K~4000K (Tunable white)		
Beam angle			20° / 35° / 45° / 20X40°		

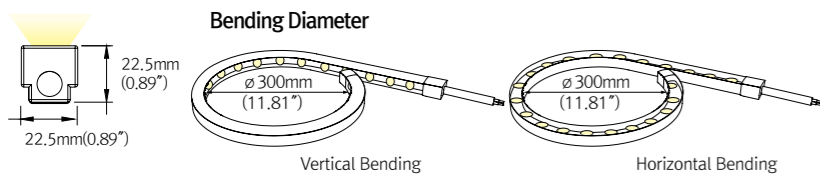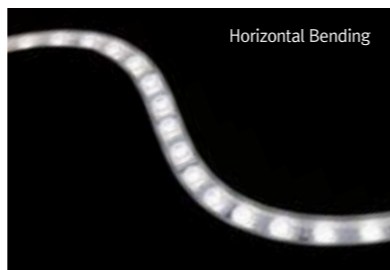

### Bracket installation

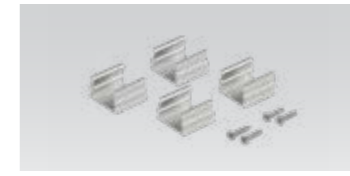
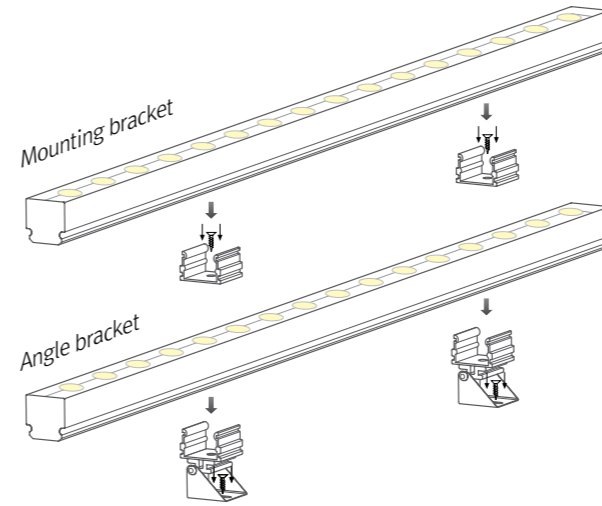


**FNL 3D Mounting Bracket**  
\_FNL 3D-BRACKET1 (1set = 4pcs)



**FNL 3D Angle Bracket**  
\_FNL 3D-BRACKET2 (1set = 4pcs)

### Extrusion installation with louver and angle bracket

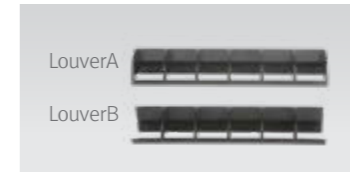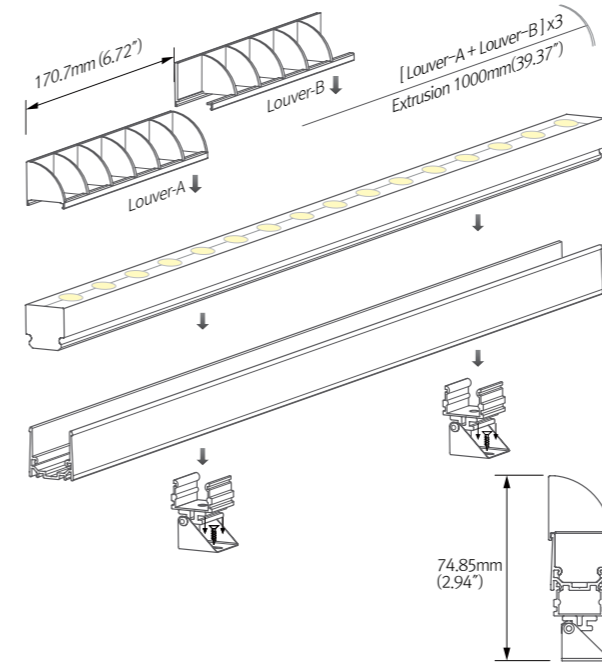

**FNL 3D Louver Kit**  
(6pcs-1000mm)  
\_FNL 3D-Louver-BK  
\_FNL 3D-Louver-WT  
A type: 3pcs  
B type: 3pcs





**FNL 3D Extrusion**  
\_FNL 3D-EXL (1M)



**FNL 3D Angle Bracket**  
\_FNL 3D-BRACKET2 (1set = 4pcs)

### Flexible Extrusion installation

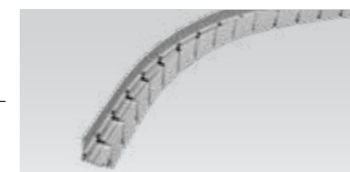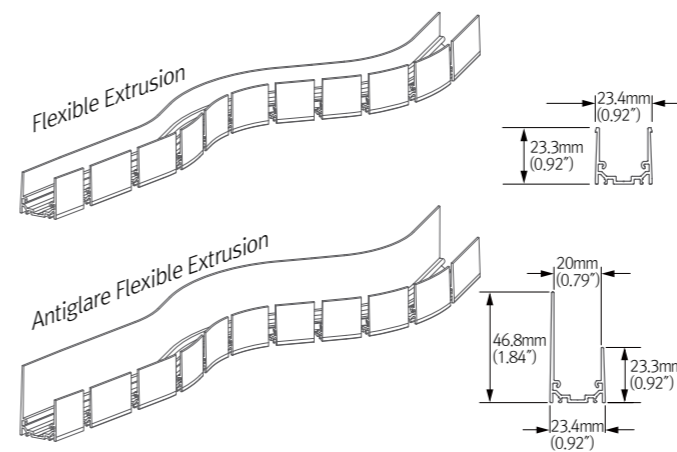

**FNL 3D Flexible Extrusion**  
\_FNL 3D-EXL-FLEX (1M)




**FNL 3D Antiglare Flexible Extrusion**  
\_FNL 3D-EXL-FLEX-AG (1M)



## FLX Stix NDFree

Slim, Simple, Safe, Fast Integral Driver



### FLX Stix NDFree


- Easy and Quick Snap Connection
- LED Driver is integral
- Innovative Slim design
- Line Voltage Phase Dimming
- Seamless and Spot Free

CRI	Ra>90	Watt	3, 5, 10, 15, 20W
Lumen	90 lm/W	Color	2700/3000/3500/4000K
Length	156 (6.14") / 291.5 (11.48") / 569.5 (22.42") / 848 (33.39") / 1126 (44.33") mm		

Wide voltage range (AC 110V, 220-240V, 277V)


Flicker-free **Flicker Free**

Phase dimming

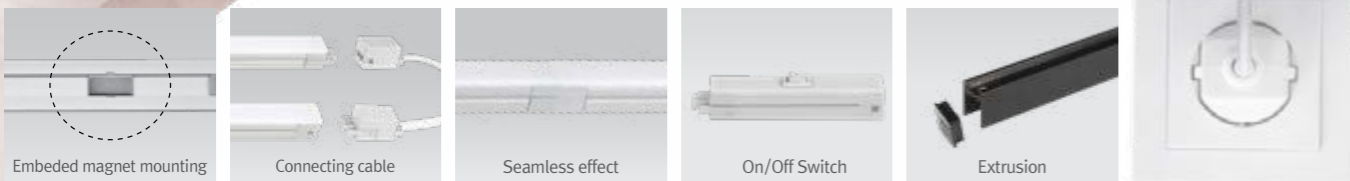

### NDPro Showcase Arm

- Aluminum body with rotating light bar
- Easy assembly with FLX Stix NDPro fixture
- Various length available
- Ideal for showcase and furniture

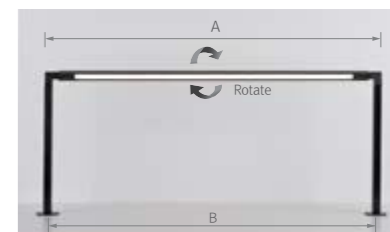


Lamp Power	Luminous Flux (4000K)	A	B
NDP 4W	300 lm	396.5mm (15.61")	381mm (15")
NDP 7W	570 lm	676.5mm (26.63")	661mm (26.02")
NDP 11W	860 lm	955.5mm (37.62")	940mm (37.01")
NDP 15W	1210 lm	1234.5mm (48.60")	1219mm (47.99")



### MonoRail Showcase Arm

- Aluminum body with rotating MonoRail Pro (MNP) and Spot (MRS)
- Easy assembly with MonoRail Pro (MNP) and Spot (MRS)
- Various length available
- Ideal for showcase and furniture

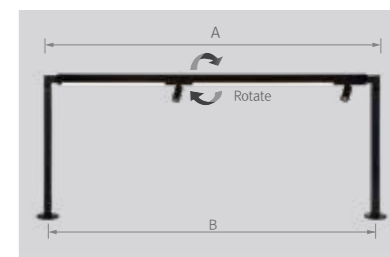


Lamp Power	Luminous Flux (4000K)	A	B
MNP 1W	113 lm	396.5mm (15.61")	381mm (15")
MNP 4W	362 lm	676.5mm (26.63")	661mm (26.02")
MNP 8W	722 lm	955.5mm (37.62")	940mm (37.01")
MRS 1W	97 lm	1234.5mm (48.60")	1219mm (47.99")
MRS 3W	246 lm		



## FLX SPOT DVP

Versatile Mini LED Spotlight



### FLX Spot DVP

- With constant voltage DC 24V driver
- Mini spotlight with various beam angle
- Dimmable with available accessories
- Available in black and white
- Special option : silver and gold

CRI	Ra>90	Watt	3W
Lumen	98 lm/W		
Colors	2700/3000/3500/4000K		
Beam Angle	28° / 40° / 50°		



Round plate



Square plate




Special Order Options

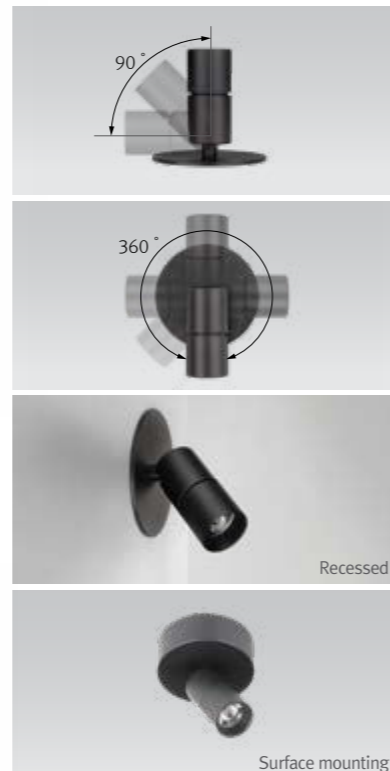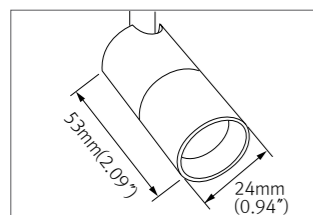

## FLX Spot DVP POLE


- With constant voltage DC 24V driver
- Mini Spotlight Pole with various beam angle
- Dimmable with available accessories
- Available in black and white
- Special option : silver and gold

CRI	Ra>90	Watt	3W
Lumen	98 lm/W		
Colors	2700/3000/3500/4000K		
Beam Angle	28° / 40° / 50°		



## FLX SPOT DVP POLE

Versatile Mini LED Spotlight

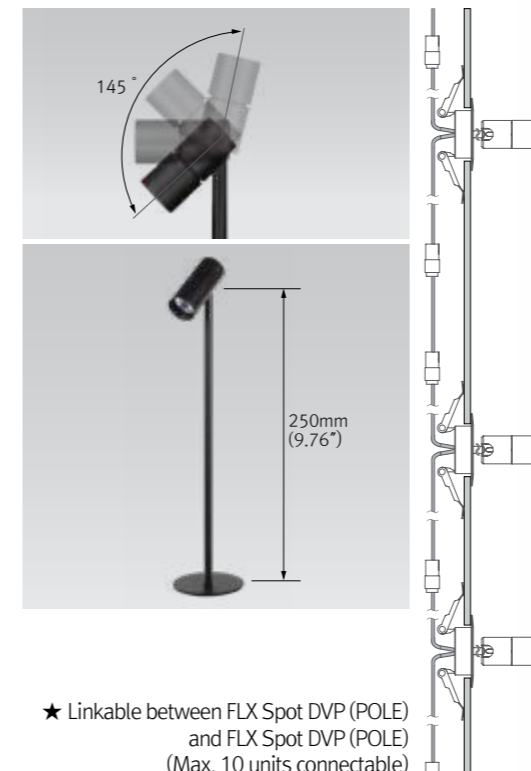


★ Linkable between FLX Spot DVP (POLE) and FLX Spot DVP (POLE) (Max. 10 units connectable)





# MonoRail Pro

Display & Cove system for long runs!

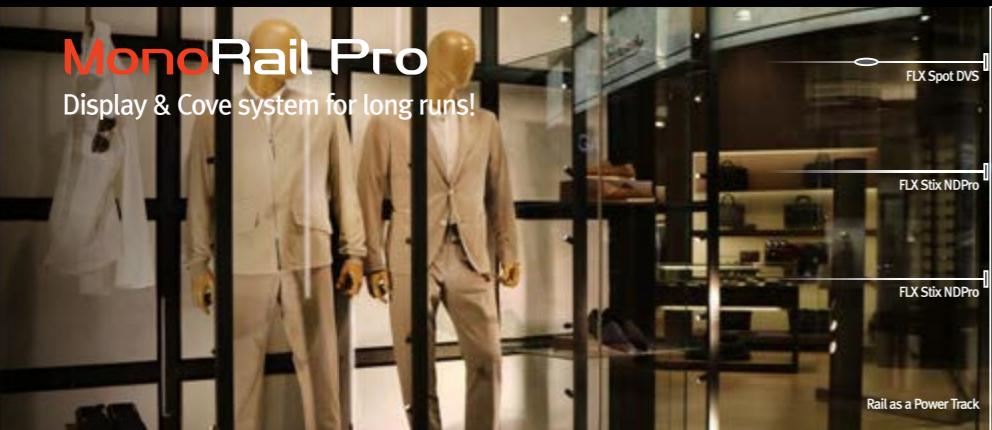

15.6mm(0.61")  
17mm  
0.07"



## MonoRail Pro (MNP)

Display and Cove Lighting for a long run lengths in low voltage systems. The Rail can light other Feellux DC products as a power track. Available in black and silver. 90+ CRI. Dimmable.

Input	DC 24V	CRI	Ra>90
Lumen	85lm/W		
Colors	2700/3000/3500/4000/5700K		



## MonoRail Spot Pro 1 (MSP1)

The perfect LED for showcase display, cabinet and furniture. Slide and swivel LED spotlight. Compatible and linkable with the MonoRail system. Available in 15°, 35° beam angles.

Watt	1.3W	CRI	Ra>90
Lumen	70lm/W	Beam angle	15°/35°

## MonoRail Spot Pro HO 3 (MSP3)

High Power version of Monorail Spot. 28°, 40°, and 50° beam angles.

Watt	2.6W	CRI	Ra>90
Lumen	98lm/W	Beam angle	28°/40°/50°

## MonoRail Spot Pro HO 6 (MSP6)

Double joint version of Monorail Spot. 25°, 38°, and 50° beam angles.

Watt	6W	CRI	Ra>90
Lumen	70lm/W	Beam angle	25°/38°/50°

# MonoRail Spot Pro



# MonoRail2


Modular Low Voltage Rail System for Flexibility and Creativity



18mm(0.71")  
16.5mm  
(0.65")



Extrusion Type

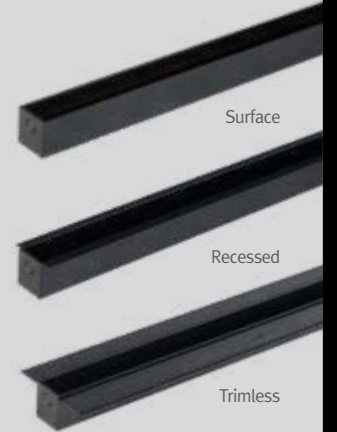

## MonoRail2


High-end slim linear LED with magnetic system & aluminum extrusion

Watt	3/4/8W	CRI	Ra>90
Lumen	80lm/W		
Colors	2700/3000/3500/4000K		

## MonoRail2 Spot

Mini spotlight with magnetic system & aluminum extrusion


Watt	3W	CRI	Ra>90
Lumen	80lm/W		
Colors	2700/3000/3500/4000K		

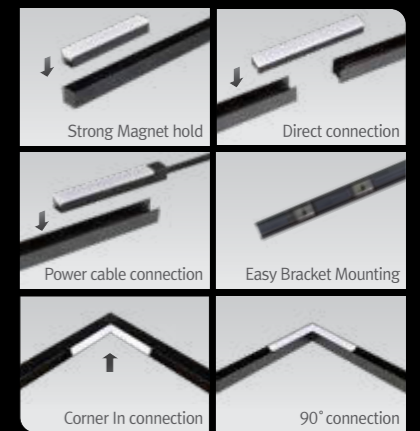



## FLX Stix CDV





Ultra Slim Refrigeration Lighting



### FLX Stix CDV

- Asymmetric Beam Angle for multiple applications
- Super slim Freezer and Cooler Lighting
- High Efficiency(115lm/w)
- High CRI(Ra>90)
- IP65 Rating
- Operating Temperature : -35°C~35°C(-95~95°F)
- Occupancy Sensor Ready
- Beam angle : Asymmetric, Batwing Wall washer, 40°


CRI	Ra>90	Watt	4,8,12,16,20W
Lumen	115lm/W	Color	3000/4000K/MEAT RED
Length	300(11.81")/600(23.62")/900(35.43")		
	/1200(47.24")/1500(59.06")mm		

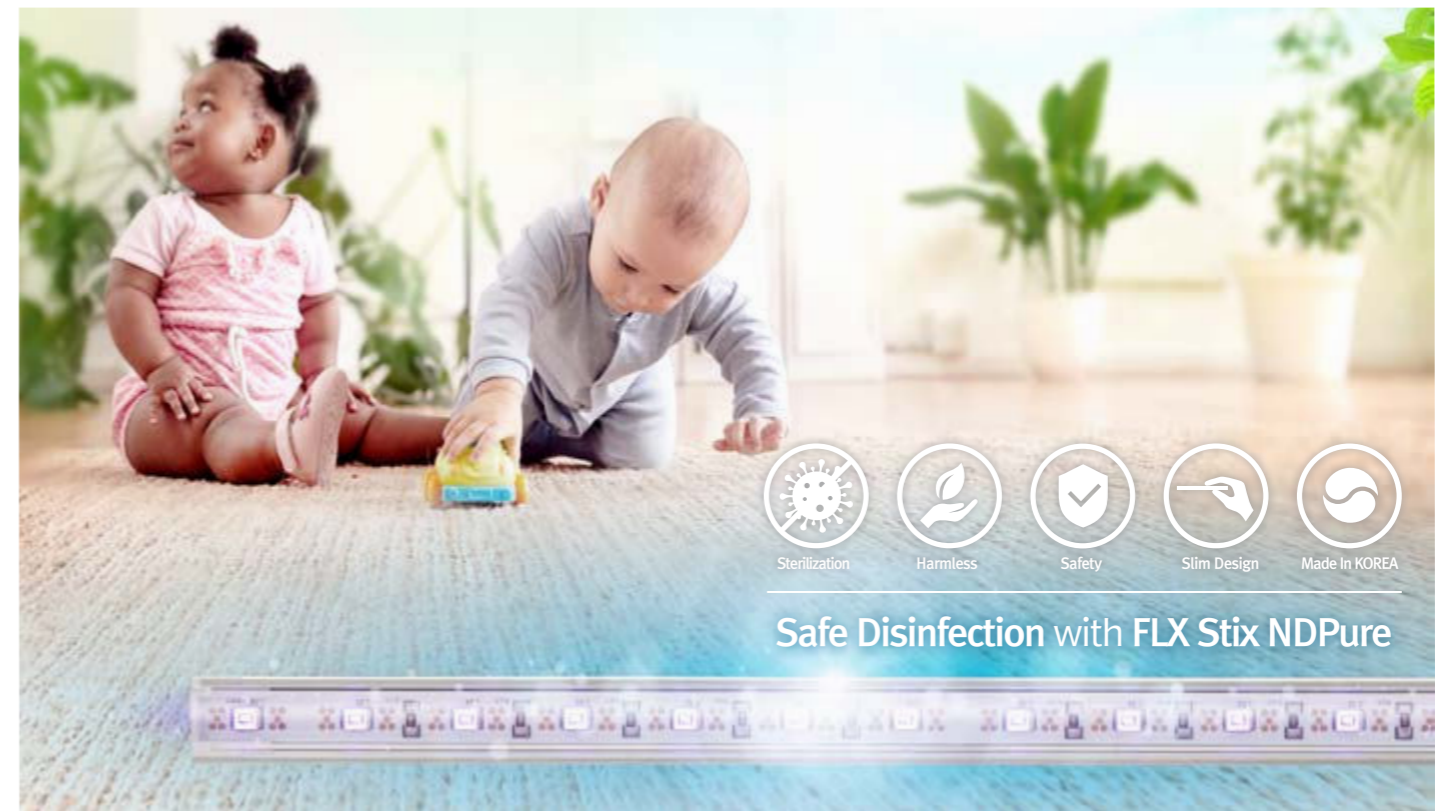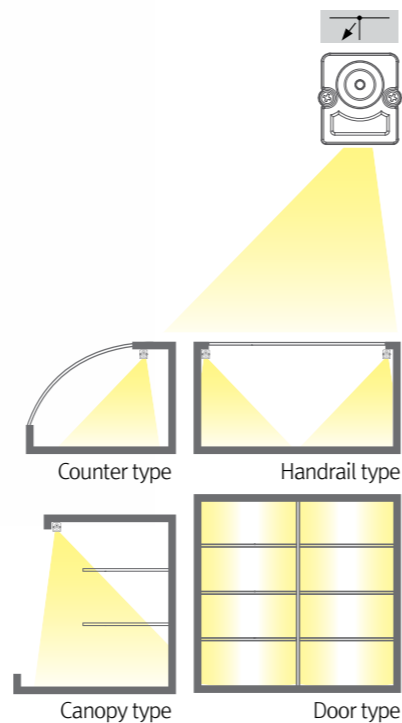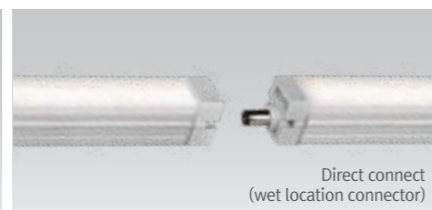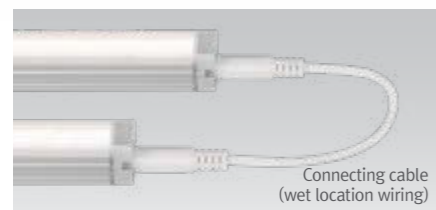

## Safe Disinfection with FLX Stix NDPure

## FLX Stix NDPure

Safe Disinfection in Multiple Area



### FLX Stix NDPure

- Safe disinfection with 405nm LED
- PMMA diffuser lens
- Super slim linear fixture with plug and play option
- Optional accessories available
- For use with constant voltage DC 24V driver
- Multiple mounting methods including magnetic
- Suitable for many locations to create a clean, safe environment


Watt	4,7,11,15W
LED	405nm
Length	284(11.18")/ 564(22.20")/ 843(33.19")
	/1122(44.17")mm



405nm LED


NDPro Body

PMMA Diffuser

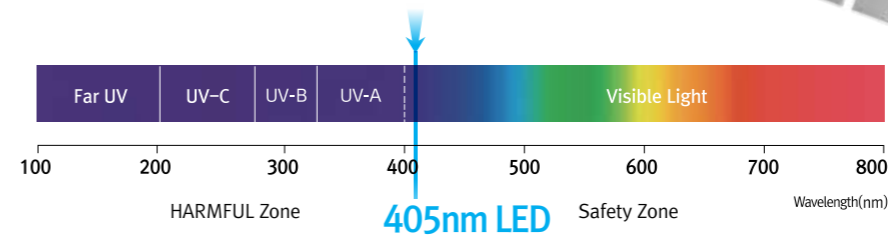


### What is 405 nm LED?

405 nanometer(nm) LED has a wavelength between Ultraviolet (10~400nm) and Visible light (400~800nm). 405nm has a different disinfection effect from UV-C as its wavelength is longer than ultraviolet rays, For this reason, it is harmless to the human body and it can be used for lighting applications.

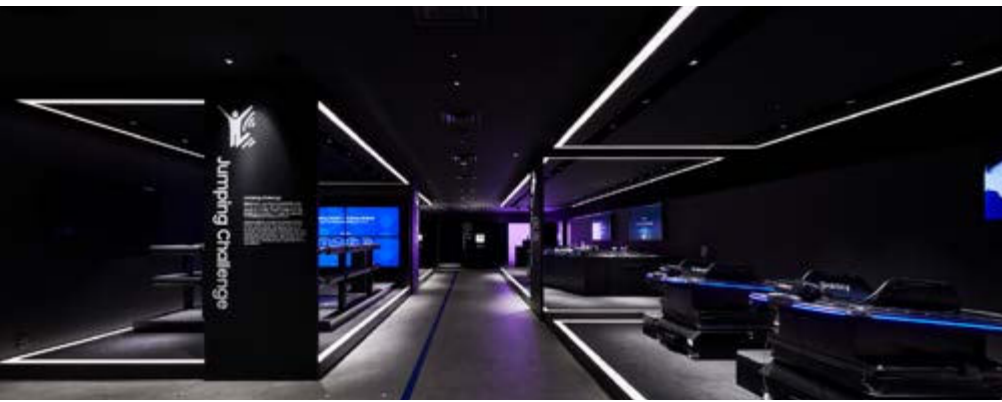

10.6mm(0.42")  
11.5mm  
(0.45")

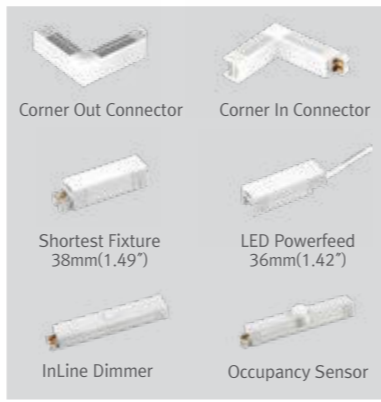


### FLX Stix NDPro

Ultra slim profile, spot free, seamless engineered fixture with tight pitch LEDs for even surface illumination and perfected color consistency. 90+ CRI, Dimmable.

CRI	Ra>90	Watt	0.5/1/3/4/7/11/15W
Lumen	80lm/W	Colors	2200/2700/3000/4000K
Length	100 (3.94") / 193 (7.60") / 284 (11.18") 564 (22.20") / 843 (33.19") / 1122 (44.17") mm		



15mm(0.59")  
12.6mm  
(0.50")

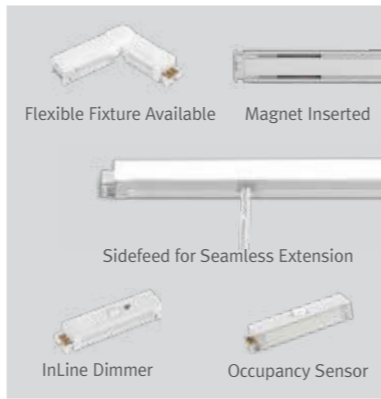



### FLX Stix HDPro

High output version of FLX Stix NDPro where more light is needed. 90+ CRI, Dimmable.

CRI	Ra>90	Watt	3/6/12/18/24W
Lumen	80lm/W	Colors	2200/2700/3000/4000K
Length	145 (5.71") / 285 (11.22") / 564 (22.20") 843 (33.19") / 1122 (44.17") mm		



15mm(0.59")  
22.1mm  
(0.50")

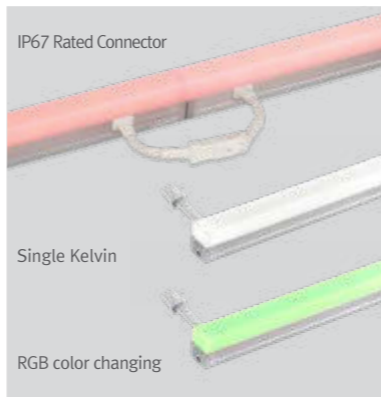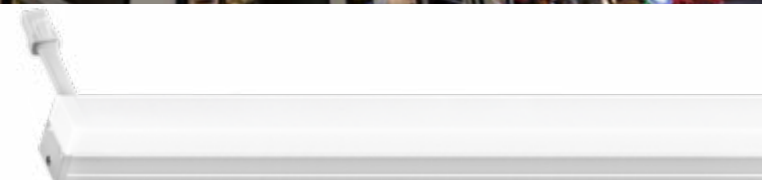

### FLX Stix ODV

Slim profile LED for exterior applications. Easy installation, IP66 Rating, Dimmable.

Input	DC 24V	IP Rating	IP66
Lumen	95lm/W	Colors	RGB/2700/3000/4000K
Length	143 (5.63") / 283 (11.14") / 562 (22.13") / 841 (33.11") mm		



## Dim to Warm system

Dim to Warm, Tunable White, 0-10V/1-10V 2CH dimming




- Slim interface with multiple functions
- Dim to warm mode
- Tunable white mode
- Quick mode change with a function switch
- Dip Switch to select 0-10V and 1-10V mode
- 1CH 100W, Total 2CH, 200W



FDD-L20



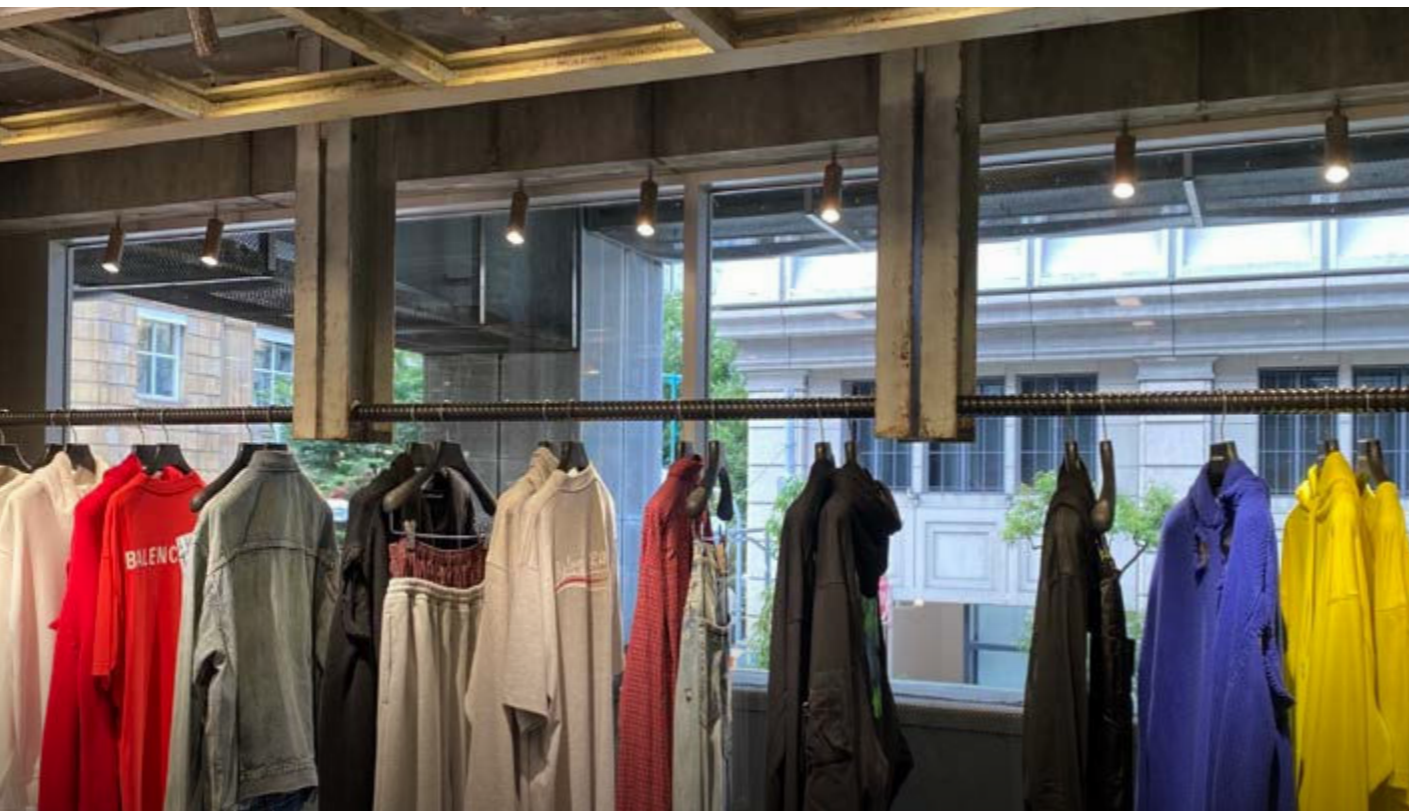

## FLT Collection

### Magnetic Low Voltage Track System

- Various lighting fixtures on a single track
- Easily extendable with direct connector
- Safe with constant voltage DC 24V
- Available in various colors
- Easy magnetic installation



**FLT-SS06**

Input	DC 24V	Watt	6W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	70lm/W	Colors	2700/3000/3500/4000K

**FLT-SS09**

Input	DC 24V	Watt	9W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	78lm/W	Colors	2700/3000/3500/4000K

**FLT-SS15**

Input	DC 24V	Watt	15W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	73lm/W	Colors	2700/3000/3500/4000K

**FLT-SS20**

Input	DC 24V	Watt	20W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	73lm/W	Colors	2700/3000/3500/4000K

**DOUBLE JOINT**  
(SS06, SS09, SS15, SS20 available)

Input	DC 24V	Watt	6 / 9 / 15 / 20W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	70/78/73/73lm/W	Colors	2700/3000/3500/4000K

**FLT-SL06**

Input	DC 24V	Watt	6W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	70lm/W	Colors	2700/3000/3500/4000K

**FLT-SM02**

Input	DC 24V	Watt	2W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	55lm/W	Colors	2700/3000/3500/4000K

**FLT-SM12**

Input	DC 24V	Watt	12W
CRI	Ra>90	Beam angle	15° / 24° / 36°
Lumen	85lm/W	Colors	2700/3000/3500/4000K

**FLT-LS10-L**

Input	DC 24V	Watt	4W
CRI	Ra>90	Beam angle	21° / 40° / 52°
Lumen	84.2lm/W	Colors	2700/3000/3500/4000K

**FLT-LS30-L**




Input	DC 24V	Watt	12W
CRI	Ra>90	Beam angle	21° / 40° / 52°
Lumen	80lm/W	Colors	2700/3000/3500/4000K

**FLT-LM30**

Input	DC 24V	Watt	10W
CRI	Ra>90	Beam angle	125°
Lumen	77lm/W	Colors	2700/3000/3500/4000K

**FLT-SP20**  
**FLT-SP30**

Input	DC 24V	Watt	2W
CRI	Ra>90	Beam angle	24° / 36°
Lumen	89lm/W	Colors	2700/3000/3500/4000K

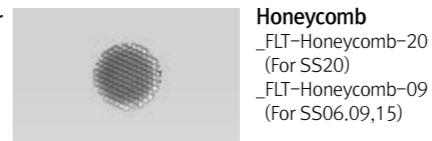
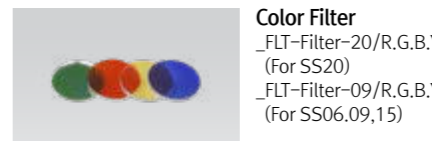
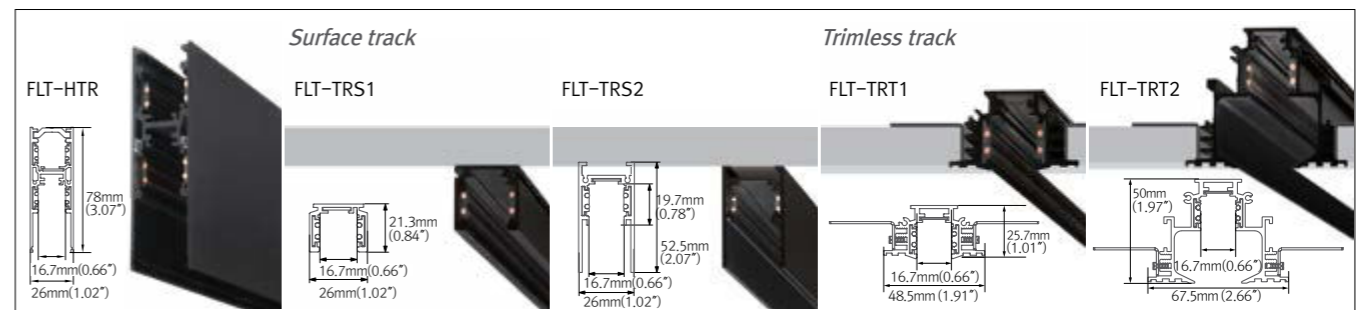




### FLXible Tape Pro

- Ultra slim flexible LED, spot free, indoor and outdoor application
- IP66 rating with UV-resistant Silicon material
- Cuttable and flexible to have design freedom
- Available in standard lengths of 1, 2, 3, 4, 5M reels Extrusion
- Inpc available

Input	DC 24V	Watt	15W/m	IP Rating	IP66
Lumen	100lm/W	Max run lengths	5M	CRI	Ra)90
Colors	2400/2700/3000/3500/4000K				

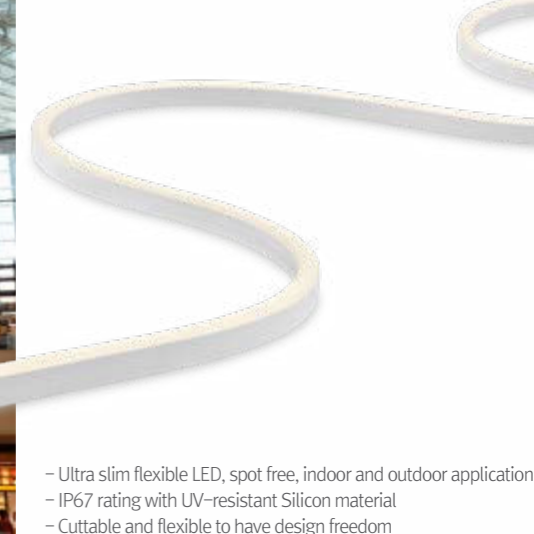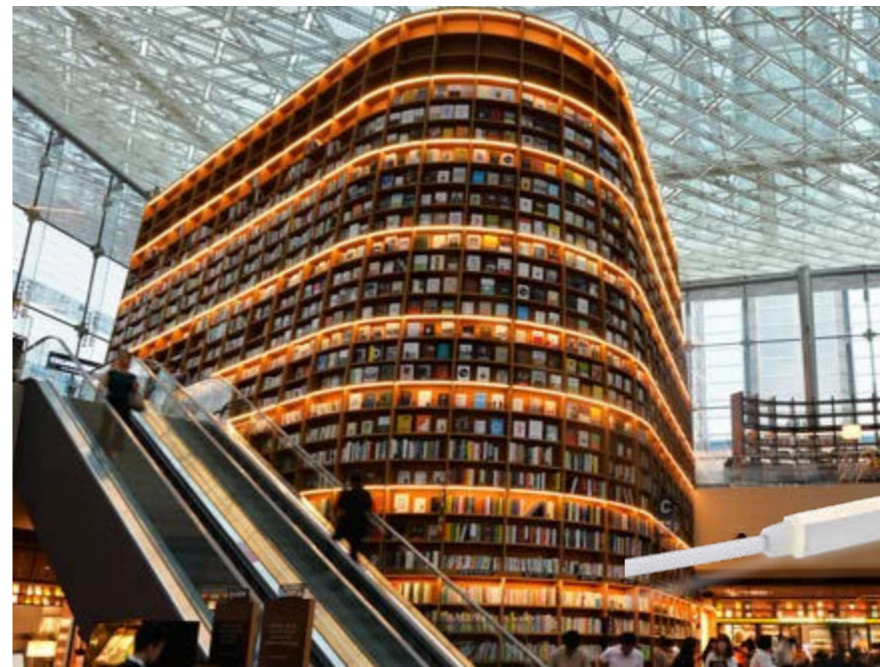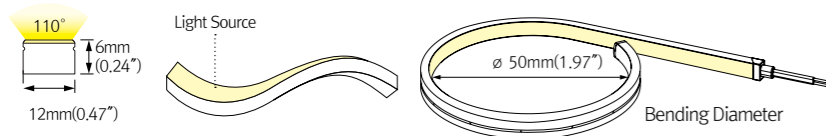


### FLXible Neon 1

Input	DC 24V	Watt	10W/m	IP Rating	IP67
Lumen	40lm/W	Max run lengths	5M	CRI	Ra)90
Colors	2200/2700/3000/3500/4000K				

### FLXible Neon 1 Dual


Input	DC 24V	Watt	5.8W/ft	IP Rating	IP67
Lumen	40lm/W	Max run lengths	5M	CRI	Ra)90
Colors	2200K-4000K (Tunable white)				

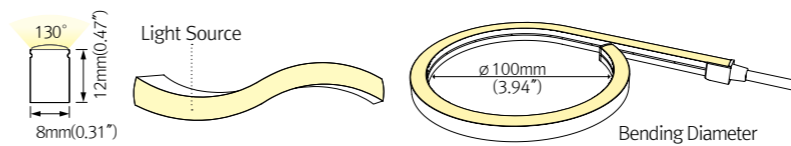

### FLXible Tape Tako

- Ultra slim flexible LED, spot free, indoor and outdoor application
- IP67 rating with UV-resistant PU material
- Cuttable and flexible to have design freedom

Input	DC 24V	Watt	18W/m	IP Rating	IP67
Lumen	100lm/W	Max run lengths	5M	CRI	Ra)90
Colors	2700/3000/3500/4000K				
Beam angle	30° / 45° / 60° / 20X45°				

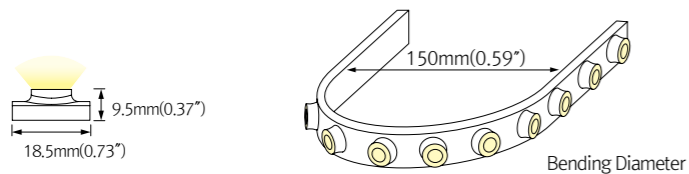

### FLXible Neon 2

Input	DC 24V	Watt	10W/m	IP Rating	IP67
Lumen	65lm/W	Max run lengths	5M	CRI	Ra)80
Colors	2200/2700/3000/3500/4000K				

### FLXible Neon 2 Dual

Input	DC 24V	Watt	5.8W/ft	IP Rating	IP67
Lumen	65lm/W	Max run lengths	5M	CRI	Ra)80
Colors	2200K-4000K (Tunable white)				



# SlimLamp Slide

LED for Cove, Contour and Cabinet.

## Linear perfection with Slimlamp Slide LED

- Easy slide connection system
- Slim design with seamless lighting
- Dimmable
- Round Diffuser (Square also available)
- Slide-Up Replacing System



### SSL Specification

- Voltage : AC 100-277V
- Lumen : 100lm/W
- Wattage : 3W/5W/10W/15W/20W/25W
- Colors : 2700K/3000K/3500K/4000K/5700K
- CRI > 90
- IP20
- Max connection: 400W(12.60")
- Length: 150mm(5.91")/320mm (12.60")/580mm (22.83")/870mm (34.25")/1160mm (45.67")/1450mm (57.09")






SlimLamp Slide (SSL)

### VSSL Specification

- Dimming: 0-10V
- Tunable version available
- Voltage : AC 100-277V
- Lumen : 85lm/W
- Wattage : 5W/10W/15W/20W
- Colors : 2700K/3000K/3500K/4000K/5700K
- CRI > 90
- IP20
- Max connection: 400W
- Length: 150mm(5.91")/320mm (12.60")/580mm (22.83")/870mm (34.25")/1160mm (45.67")/1450mm (57.09")




SlimLamp Slide-V (VSSL)

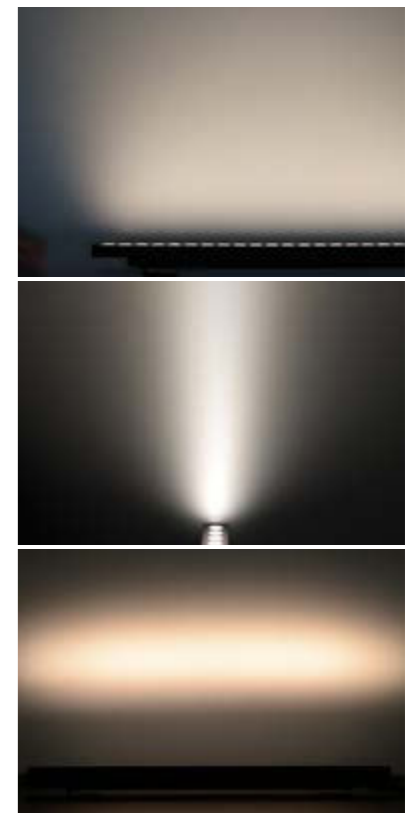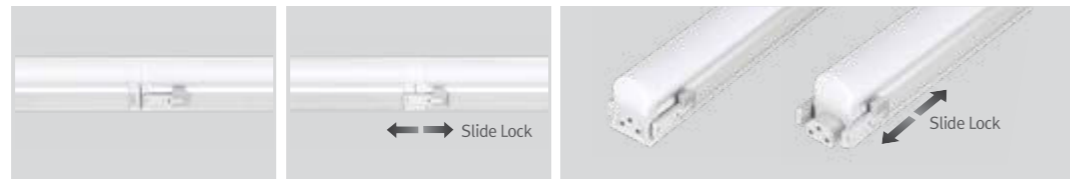

## LuxFeel Interior Line

High output Grazer with Multiple Beam Angles



### LuxFeel Interior Line

- Indoor & Outdoor Application
- Versatile: Fitting shop, Hotel, Facades
- IP 67: Water resistance and suitable for outdoor use
- Adjustable product : Various Beam angle options
- Rotatable product to be adjusted conveniently
- High color rendering
- Various length available

Input	DC 24V	Watt	12/24/36/48W
IP Rating	IP67	Lumen	80lm/W
CRI	Ra>90	Colors	3000/4000K
Beam angle			10X60° / 30° / 40°
Length			300 (11.81") / 600 (23.62") / 900 (35.43") / 1200 (7.24")mm





**FEELUX**