

SlimLine LED

LED for Display, Cabinet, Furniture & Cove

Seamless LED



- Rigid aluminum extruded body permits effective heat emission
- Dark spot free at the linking point
- Transparent, Ivory white Diffuser
- Eco friendly product, No emission of Mercury and CO2
- AC power driver built in
- Compatible with accessories for fluorescent DimSlimLine by PWM controller



Clear flat diffuser

Milky flat diffuser






Specification

Model Name	Power Input	Lamp Power	Luminous Flux	Efficiency	Color Rendering	Available Color	Operating Temperature
LDSLL10-UNV	AC 100~240V	10W	700lm	70lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C
LDSLL15-UNV	AC 100~240V	15W	1,050lm	70lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C
LDSLL20-UNV	AC 100~240V	20W	1,400lm	70lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C

Dimension


Model Name	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)
LDSLL10-UNV	10	582.5	33	37.5	50.2
LDSLL15-UNV	15	882.5	33	37.5	50.2
LDSLL20-UNV	20	1182.5	33	37.5	50.2

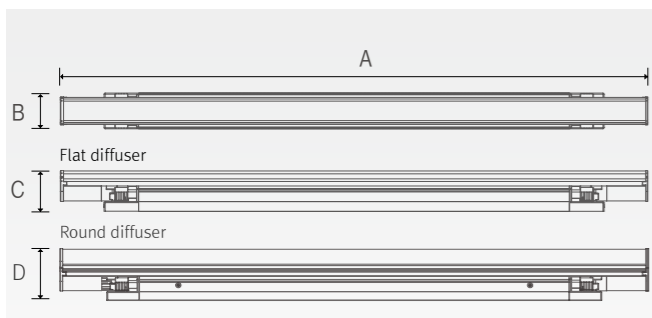

Max. connection

- Max. connection(Dimming) : 20pcs
- Max. connection(Non-Dimming) : 600W
10W(60 pcs), 15W(40 pcs), 20W(30pcs)

Dimming

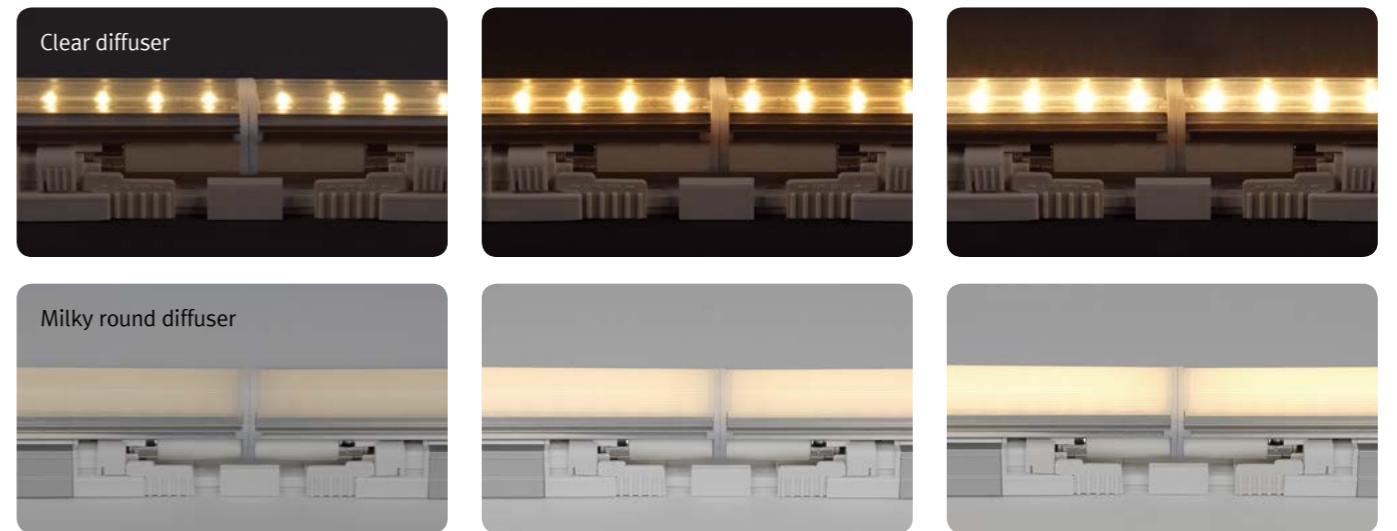

Accessories

① Connecting cables

DSLLPTC	DSLLPTC1	DSLLPTC2	DSLLPTC4	DSLLPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

② Direct connector

SLLCPL/T

③ Open power cable (1,800mm)

DSLLOPC230/T

④ LED tube

LFBL10 40K-RM/H	LFBL15 40K-RM/H	LFBL20 40K-RM/H
10W 4000K TUBE	15W 4000K TUBE	20W 4000K TUBE

⑤ End cap

SLL-CAP

⑥ Dimming Interface (Phase to PWM translator)

FDA-P1H : 1CH 200W (200W/CH, 1CH)

⑦ Dimming Interface (DMX512 to PWM translator)

FDA-P2M : 2CH Max 400W (200W/CH, 2CH)

⑧ Dimming Interface (0-10V/1-10V to PWM translator)

DA02V10SE : Max. 400W (200W/CH, 2CH)

