

FLX Stix CDV*Ultra Slim Refrigeration lighting*

Super slim Freezer and Cooler lighting




- Special Beam Angle for Multiple Uses.
- Super slim Freezer and Cooler lighting
- Special Color Red Led for Meat
- High Efficiency / High Output
- High CRI (CRI 90)
- IP65 Rating
- Comply with EN 60335-2-89





Asymmetric frosted




Specification


Model Name	Voltage Input	Lamp Power	Luminous Flux/4000K	Energy Efficiency	Color Rendering	Available Color	Operating Temperature	IP
CDV4-40K-24V	DC24V	4W	481 lm	115 lm/W	Ra > 90	3000, 4000K	-30~35°C	IP65
CDV8-40K-24V		8W	970 lm					
CDV12-40K-24V		12W	1456 lm					
CDV16-40K-24V		16W	2000 lm					
CDV20-40K-24V		20W	2480 lm					
CDV4-MR-24V		4W	243 lm	60 lm/W	-	MEAT RED		
CDV8-MR-24V		8W	488 lm					
CDV12-MR-24V		12W	726 lm					
CDV16-MR-24V		16W	970 lm					
CDV20-MR-24V		20W	1201 lm					

Dimension

Model Name	Power Input	Lamp Power	A(mm)	B(mm)	C(mm)
CDV4-40K(MR)-24V	DC24V	4	300	16.5	17.8
CDV8-40K(MR)-24V	DC24V	8.3	600	16.5	17.8
CDV12-40K(MR)-24V	DC24V	12.3	900	16.5	17.8
CDV16-40K(MR)-24V	DC24V	16.5	1200	16.5	17.8
CDV20-40K(MR)-24V	DC24V	20.6	1500	16.5	17.8

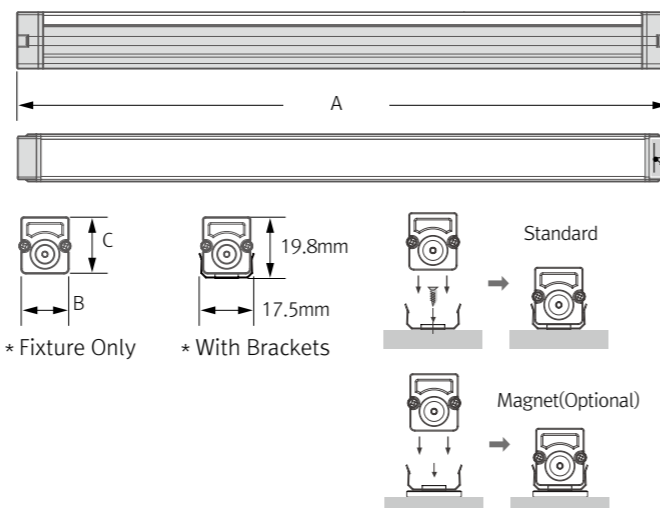

Connection

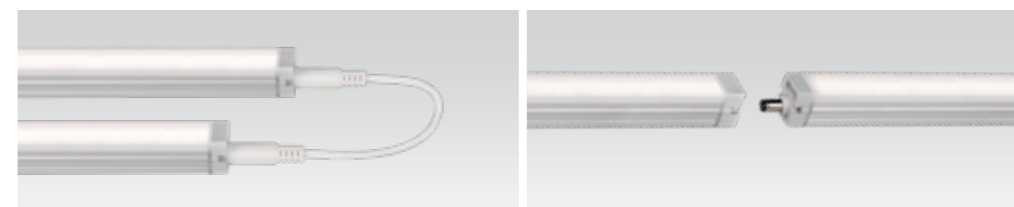

Accessories

FLX Stix CDV

CDV4-(color)K-24V (4W)	CDV4-MR-24V (4W)
CDV8-(color)K-24V (8W)	CDV8-MR-24V (8W)
CDV12-(color)K-24V (12W)	CDV12-MR-24V (12W)
CDV16-(color)K-24V (16W)	CDV16-MR-24V (16W)
CDV20-(color)K-24V (20W)	CDV20-MR-24V (20W)



Connecting Cable

- CDVPTC 150mm
- CDVPTC 300mm
- CDVPTC 600mm



Direct connector

- CDVCPL



Power cable

- CDVPC 1,800mm



Open Power cable (Standard type)

- CDVOPC 1,800mm




Open Power cable (Vertical type)

- CDVOPC-V 1,800mm



Mounting Bracket (End cap included)

- CDV-BRACKET



Mounting Magnet Bracket (Optional)

- CDV-BRACKET-M



LED Driver : FLC200-24V/T (200W, DC24V)

- IP66



LED Driver : FLC75-24V/T (75W)

