


FLXible Neon 360

360 degree Illuminaion Decorative Lighting

Create Space Design Freedom with Linear and Curve




- 360° seamless flexible luminaire
- Bend Direction Horizontally and Vertically
- Indoor Application
- Field Cuttable 50mm
- Available in Standard Lengths 5M(16.4ft)
- Architectural and interior contour lighting
- Dimmable
- Tunable, RGB available



Specification

Model Name	Power Input	Lamp power	Luminous Flux	Color Rendering	Available Color	Operating temperature	IP	Beam Angle
FN360 24K-24V-C90-1M	DC 24V	10 W/m	160 lm/m	Ra > 90	2,400K	-25° C to 45° C	IP65	360°
FN360 27K-24V-C90-1M	DC 24V	10 W/m	158 lm/m	Ra > 90	2,700K	-25° C to 45° C	IP65	360°
FN360 30K-24V-C90-1M	DC 24V	10 W/m	161 lm/m	Ra > 90	3,000K	-25° C to 45° C	IP65	360°
FN360 35K-24V-C90-1M	DC 24V	10 W/m	183 lm/m	Ra > 90	3,500K	-25° C to 45° C	IP65	360°
FN360 40K-24V-C90-1M	DC 24V	10 W/m	170 lm/m	Ra > 90	4,000K	-25° C to 45° C	IP65	360°
FN360 50K-24V-C90-1M	DC 24V	10 W/m	184 lm/m	Ra > 90	5,000K	-25° C to 45° C	IP65	360°
FN360 60K-24V-C90-1M	DC 24V	10 W/m	179 lm/m	Ra > 90	6,000K	-25° C to 45° C	IP65	360°
FN360 SD-24V-C90-1M	DC 24V	10 W/m	158 lm/m	Ra > 90	2,700K~5,000K	-25° C to 45° C	IP65	360°
FN360 RGB-24V-1M	DC 24V	10 W/m	75 lm/m	Ra > 90	Red 620~625nm	-25° C to 45° C	IP65	360°
	DC 24V	10 W/m	153 lm/m	Ra > 90	Green 515~525nm	-25° C to 45° C	IP65	360°
	DC 24V	10 W/m	34 lm/m	Ra > 90	Blue 460~465nm	-25° C to 45° C	IP65	360°

Dimension

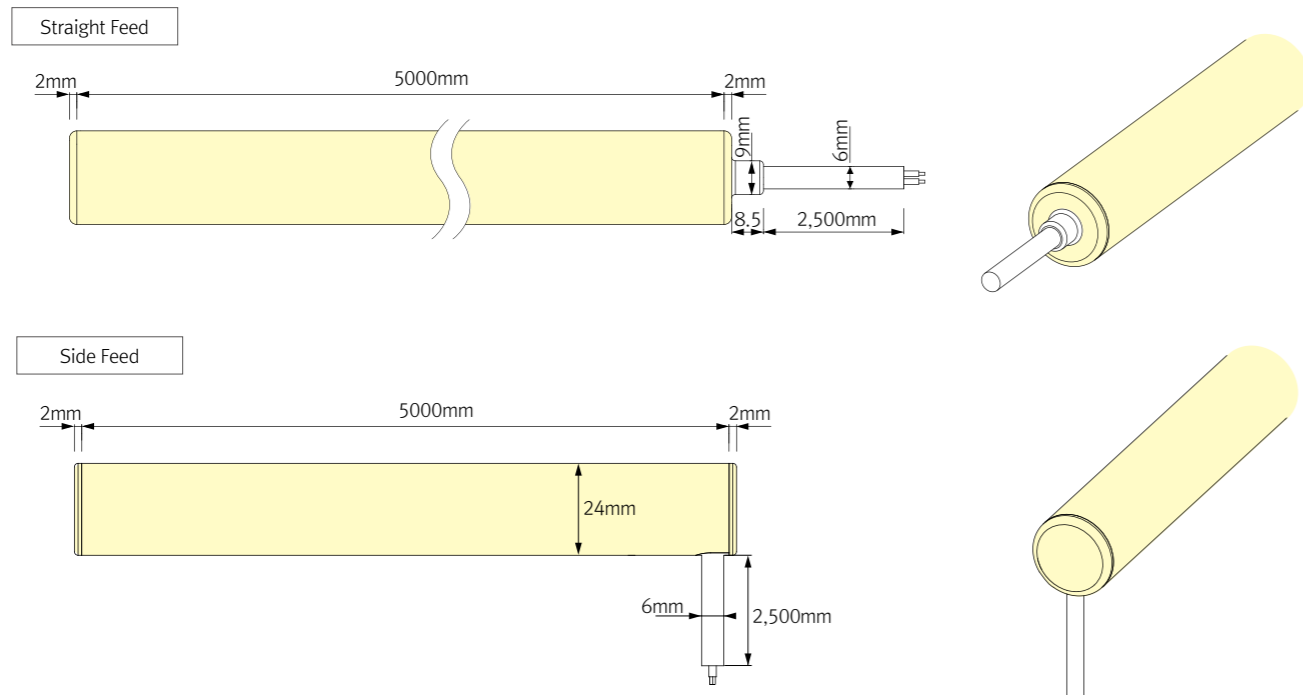

Accessories

- a FLXible Neon 360**
- b Mounting Bracket**
FN360-BRACKET1
- c Mounting Extrusion**
FN360-EXL
- d Hanging Bracket**
FN360-BRACKET1, SK1
- e Rigid Hanging Bracket**
FN360-BRACKET1, SK2
- f Hanging Extrusion**
FN360-EXL, SK1
- g Rigid Hanging Extrusion**
FN360-EXL, SK2
- h Vertical Surface Mounting**
FN360-SV-PENDANT
- i Vertical Double Surface Mounting**
FN360-SU-PENDANTT
- l Vertical Hanging Mounting**
FN360-V-PENDANT
- k Side Feed Connecting**
FN360-CPL2
- l End to End Connecting**
FN360-CPL
- m Silicone End cap**
FN360-END CAP
- n LED Driver with 12way distributor, with power cord (1,800mm)**

Part No	FLC30-24V/T	FLC75-24V-P/T
Capacity	30W 24V	75W 24V
- o LED Driver**
FLC200-24V/T (200W) with 12way distributor
- p Dimming Interface (0-10V)**
FDC-L10 : Max. 100W (100W/CH, 1CH)
- q Dimming Interface (0-10/1-10, DMX512)**
FDA-L2M0 : Max. 200W (100W/CH, 2CH)
- r Dimming Interface (Dali)**
FDD-L1DA : Max. 200W (100W/CH, 1CH)
- s Dimming Interface (Zigbee)**
FDD-L2Z : Max. 200W (100W/CH, 2CH)
- t Switch (Zigbee)**
FSM-Z1 : Wireless Control
- u Occupancy sensor**
FLS-P24V
- v Door and motion sensor**
FLS-M24V

