

## LuxFeel Interior Line

Light for facades, window display

LED Facade luminaire for near and far



- Ideal for exhibition or commercial place
- Adjustable product: beam angle changeable
- Light for facades, windows display and architecture
- High color rendering
- Various length available








**Specification**


Model Name	Voltage Input	Energy Consumption	Luminous Flux	Energy Efficiency	Color Rendering	Available color	Beam Angle	Material	Housing Color
LIL12 40K-24V	DC 24V	12W	850 lm	70 lm	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,000K	32°, 46° Oval 13° x 40°	AL	BK, SV, WT
LIL24 40K-24V	DC 24V	24W	1,700 lm	70 lm	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,000K			
LIL36 40K-24V	DC 24V	36W	2,550 lm	70 lm	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,000K			
LIL48 40K-24V	DC 24V	48W	3,400 lm	70 lm	Ra > 90	2,700K/3,000K/3,500K/4,000K/5,000K			

**Dimension**

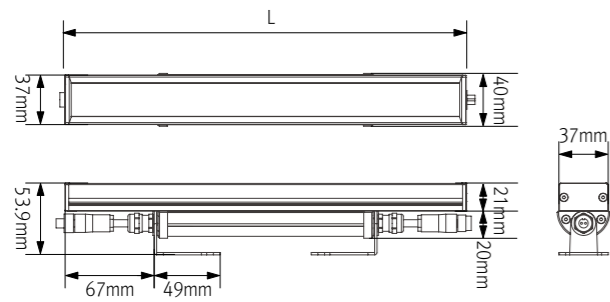


Model Name	L (Length/mm)
LIL12 40K-24V	300.5
LIL24 40K-24V	600.5
LIL36 40K-24V	900.5
LIL48 40K-24V	1,200.5

**Installation**

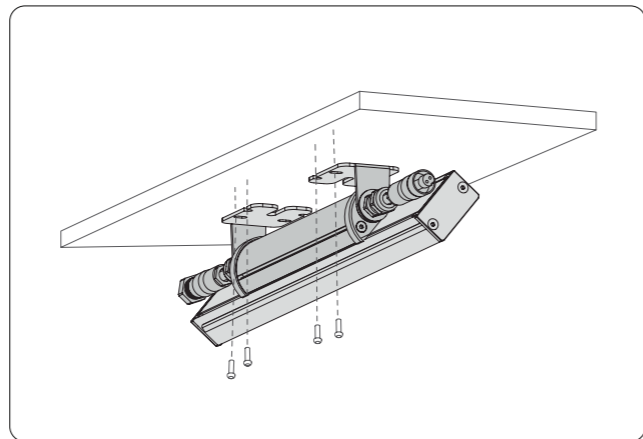

**Photometric data**

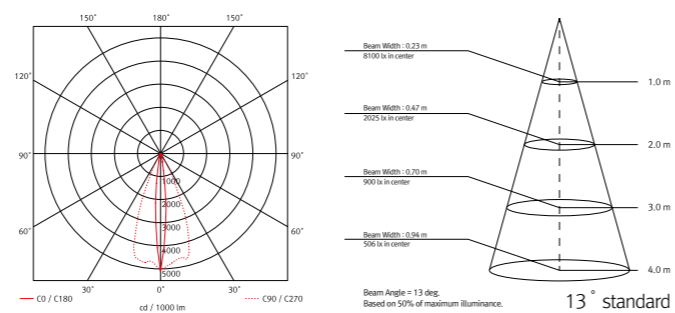

**Notice**

- Max. connection : 100W in one row (single power feed)

**Light output**



**Accessories**

Ⓐ Open Power cable : LILOPC (2,500mm)

\* Available Color : Black, White



Ⓑ LED Driver with 12way distributor with power cord (1,800mm)

Part NO	FLC30-24V/T	FLC75-24V-P/T
Capacity	30W 24V	75W 24V



Ⓒ LED Driver : FLC200-24V/T (200W, DC24V)

LILPTC	LILPTC1	LILPTC2	LILPTC4	LILPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

