



### Product Specification

PRODUCT FDD-L2Z  
 INPUT DC24V  
 OUTPUT LED MAX. 100W/CH

INPUT SIGNAL ZIGBEE  
 OUTPUT SIGNAL PWM 2CH  
 LED LAMP DC 24V LED



### Designation and Connection method

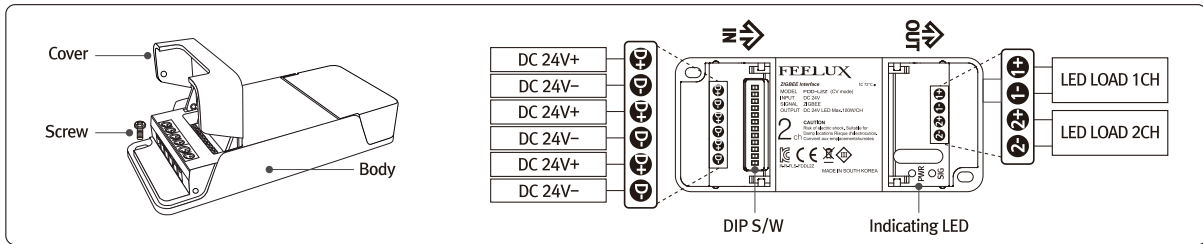

### Installation

**1** Open both covers and secure product.

**2** Connect DC power like as input direction shown in wiring diagram.

**3** Connect the LED module to the output terminal as shown in the wiring diagram.

**4** Close the cover after arranging the wire.

- PWR(RED LED) : Lights up when powered
- SIG(GREEN LED) : Lights up when receiving a signal

Press the reset button for 3 seconds to initialize the interface.

- DIMMING SPEED
- OFF-DIMMING Immediately, ON-DIMMING Smoothly
- OFF-Maintain brightness upon power up, ON-Maximum illuminance upon power up
- OFF-2Channel, ON-1Channel(Simultaneous motion)

### Safety Precaution

#### WARNING

Risk of Electrical Shock – More Than One Source of Supply – Disconnect All Power Sources Before Servicing

#### CAUTION

- Do not connect over 100W per channel. Max – 100W per Channel
- Do not touch with wet hand. There is a chance of electric shock.
- Do not install the product close to flammables or heaters.
- Do not pull fixed wires at the terminal
- Do not install in wet place. There is a chance of electric shock
- Pull out the power cord in case of smoke or strange smell
- Do not disassemble or remodel this product

### Product warranty

One-year warranty, with one-to-one free replacement after inspection. (excluding brackage due to transportation & mis-handling)