

PRODUCT FEATURES

- Linkable together with FLX series
- Virtually no heat emission and no UV radiation
- Available in white, black
- With constant voltage DC 24V driver
- Dimmable with available accessories
- Slim puck light

PRODUCT SPECIFICATIONS


Power Input	24VDC Constant Voltage Feelux or Class 2 Drivers
Color Rendering Index	Ra>90
Available CCTs	2700K, 3000K, 3500K, 4000K, 6000K
Energy Efficiency	LED 100 lm/W, Luminaire 100lm/W
Operating Temperature Ranges	0-45°C (32-113°F)
Dimming with Feelux Interface	PWM/0-10V/DALI/PHASE/DMX512/WIRELESS
Material	Aluminum
Beam Angle	25°, 45°, 60°
Lamp Life	50,000hr / 70%
Warranty	3 year
Product is approved for Closet / Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification	

SPECIFICATION

Model Name	Color	Power Input	Lamp Power	Luminous Flux	Luminous Efficacy	Color Rendering Index	CCT	Beam Angle	Operating Temperature
DVS4A 40K-24V-SW-WT-25	White Black Silver Gold	DC 24V	4.5 W	487 lm	108 lm/w	Ra > 90	2700K/3000K/3500K/4000K/5700K	25°	0 ~ 45°C
DVS4A 40K-24V-SW-WT-45		DC 24V	4.6 W	502 lm	109 lm/w	Ra > 90	2700K/3000K/3500K/4000K/5700K	45°	0 ~ 45°C
DVS4A 40K-24V-SW-WT-60		DC 24V	4.6 W	485 lm	105 lm/w	Ra > 90	2700K/3000K/3500K/4000K/5700K	60°	0 ~ 45°C


DIMENSION

* Type A (Linkable)

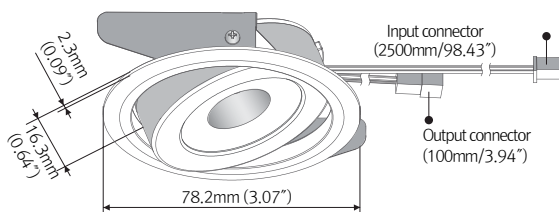


BEAM SPREADS


DVS4A 40K-24V-SW-25



DVS4A 40K-24V-SW-45




DVS4A 40K-24V-SW-60




INSTALLATION

Linkable between FLX Spot DVS Swivel & FLX Spot DVS Swivel




Linkable between FLX Spot DVS Swivel & FLX series



Linkable between FLX series & FLX Spot DVS Swivel




Mounting Arrangements

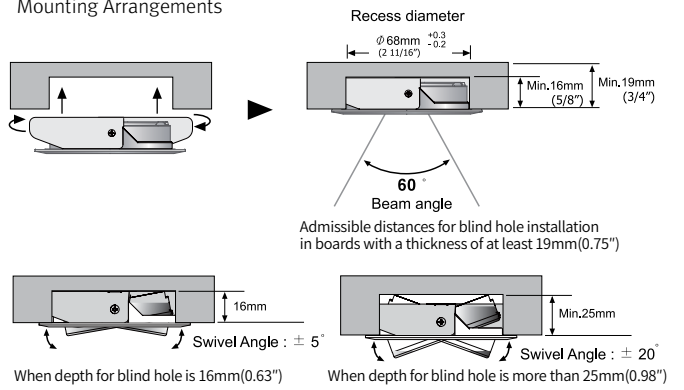

VARIOUS OPTIONS



COMPONENTS



FLX Spot DVS Swivel

- __DVS4A 40K-24V-SW-WT
- __DVS4A 40K-24V-SW-BK
- __DVS4A 40K-24V-SW-GD
- __DVS4A 40K-24V-SW-SV




Extension cable

- __DVSPTC (2,500mm/98.43")



Connecting cable

- __NDVDVSPTC (1,000mm/39.37")



Connecting cable

- __NDPDVSPTC (1,000mm/39.37")



Connecting cable

- __NDVPC (2,500mm/98.43")



Connecting cable

- __NDPPC (2,500mm/98.43")



LED Drivers

- __FLC30-24V/T (30W)
 - __FLC75-24V/T (75W)
- with distributor and power cord (1,800mm)



LED Driver

- __FLC200-24V/T (200W)
- with 12way distributor



Dimming Interface

- __FDC-L10
- (0-10V)
Max. 100W (100W/CH, 1CH)



Dimming Interface


- __FDA-L2MO
- (0-10V/1-10V, DMX512)
Max. 200W (100W/CH, 2CH)
 - __FDA-L5M (DMX512)

Max. 200W (50W/CH, 5CH)



Dimming Interface

- __FDD-L1DA
- (Dial)
Max. 200W (100W/CH, 1CH)



Door and motion sensor

- __FLS-M24V



Occupancy sensor

- __FLS-P24V