


DATE PROJECT LOCATION TYPE

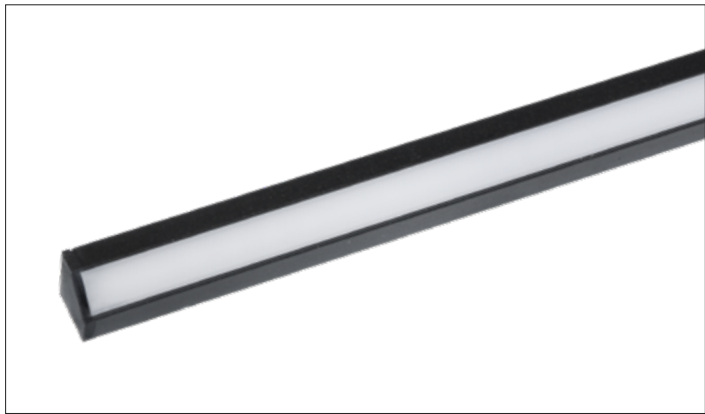

PRODUCT FEATURES

- 45° Asymmetric profile for Corner
- Seamless Spot Free Illumination
- Close Pitch LEDs
- Perfected Color Consistency
- Easy mounting with Magnet plate
- Ultra slim Profile(12mm)
- Multiple Lengths for Easy Configuration
- Dimmable

PRODUCT SPECIFICATIONS

Power Input	24V DC Constant Voltage
Color Rendering Index	CRI RA>95
Available CCTs	2700K, 3000K, 3500K, 4000K
Energy efficiency	43lm/W - 10W/m - 335.7lm/m
Operating Temperature Ranges	32-113°F (0-45°C)
Finish	Aluminum
Beam Angle	100°
Lamp life	50,000hr / 70%
Warranty	3 year Warranty
IP	IP20

DIMENSIONS



FLX Stix NDP Corner, 5W, 465mm



FLX Stix NDP Corner, 8W, 764mm




FLX Stix NDP Corner, 11W, 1,064mm



FLX Stix NDP Corner, 14W, 1,364mm



FLX Stix NDP Corner, 17W, 1,664mm




FLX Stix NDP Corner, 23W, 1,964mm





Performance data shown below for 3000K CCT. Refer to individual luminaire IES files for other CCT options

Model Name	Power Input	Lamp Power	Luminous Flux/3000K	Color Rendering	A mm	B mm	C mm
NDP5-(Color)K-24V-C90-C	DC 24V	4.65 W	174.5 lm	96	12	52	465
NDP8-(Color)K-24V-C90-C		7.64 W	308.1 lm				764
NDP11-(Color)K-24V-C90-C		10.64 W	458.2 lm				1,064
NDP14-(Color)K-24V-C90-C		13.64 W	524 lm				1,364
NDP17-(Color)K-24V-C90-C		16.64 W	646 lm				1,664
NDP23-(Color)K-24V-C90-C		22.64 W	874 lm				1,964

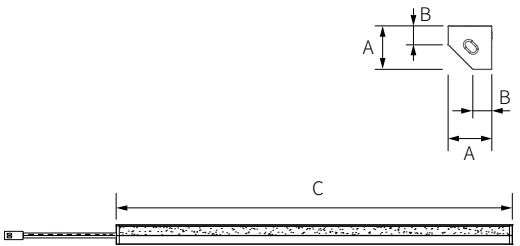

MAOUNTIIOG OPTIONS

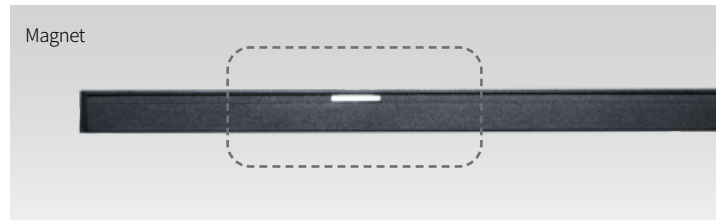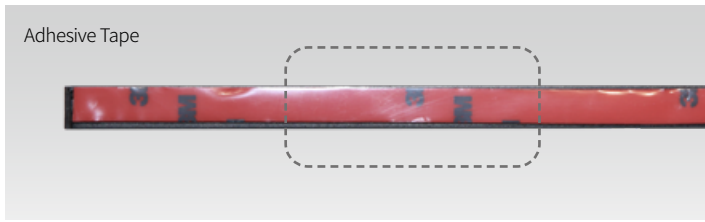


INSTALLATION

1. Magnet Mounting
; Fix on desired position(Steel) through magnet built-in LED.




2. Attaching Mounting
; Fix on desired position through a Tape.

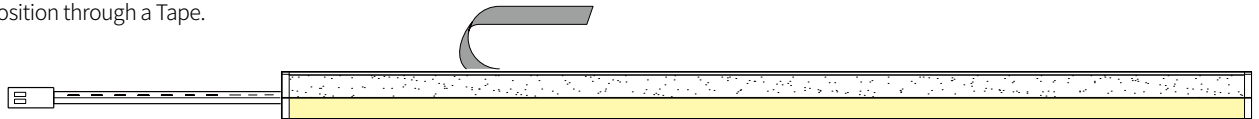


CONNECTION

The connector of the supply must be inserted firmly.

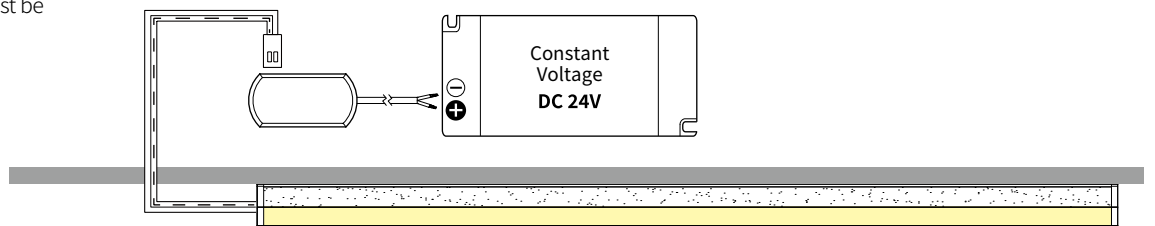

NDP Corner is designed for standalone use and not linkable

LED DRIVER OPTIONS

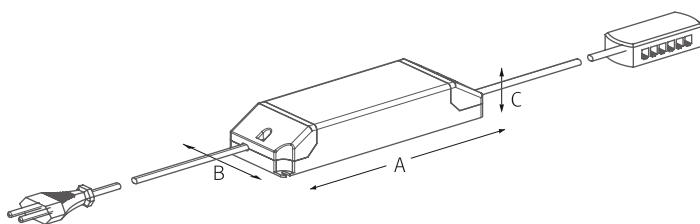


Model Name	A (mm)	B (mm)	C (mm)
FLC30-24V/T	150	41	31
FLC75-24V/T	180	60	32


*Requires dimming interface for dimming

BEAM SPREADS


NDP5 30K-24V-C90-WT-C

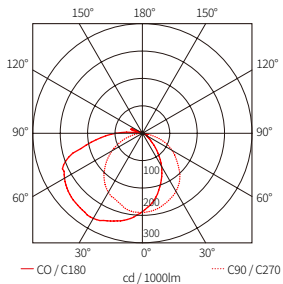


NDP8 30K-24V-C90-WT-C

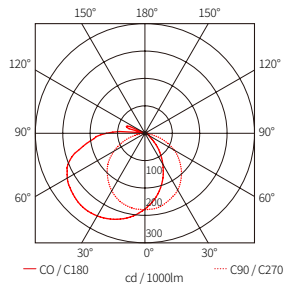


NDP11 30K-24V-C90-WT-C



NDP14 30K-24V-C90-WT-C



NDP17 30K-24V-C90-WT-C



COMPONENTS



12 Port Hub

__12 Way distributor
Included with Cord and Plug
drivers. Order separately for
3rd Party Drivers



LED Drivers

__FLC30-24V/T (30W)
__FLC75-24V/T (75W)
with distributor and power
cord (1,800mm)



LED Driver

__FLC200-24V/T (200W)
with 12way distributor



Door and motion sensor

__FLS-M24V



Occupancy sensor

__FLS-P24V



Dimming Interface (0-10V/1-10V)

__FDC-L10 (Max. 100W)



Dimming Interface

__FDA-L2MO
(0-10V/1-10V, DMX512)
Max. 200W (100W/CH, 2CH)



Dimming Interface (Dail)

__FDD-L1DA
Max. 200W (100W/CH, 1CH)



Dimming Interface (Zigbee)

__FDD-L2Z



Wireless Control (Zigbee Switch)

__FSM-Z1